


Windows 8 Connection Guide

This guide will outline the general steps required to connect a device with Windows 8 to the “nasabyod” network.


1. Navigate to the Start screen. Bring up the Charms Bar on the right side of the screen




2. Click on “Settings”




3. Click on the Wi-Fi icon at the bottom of the Settings menu

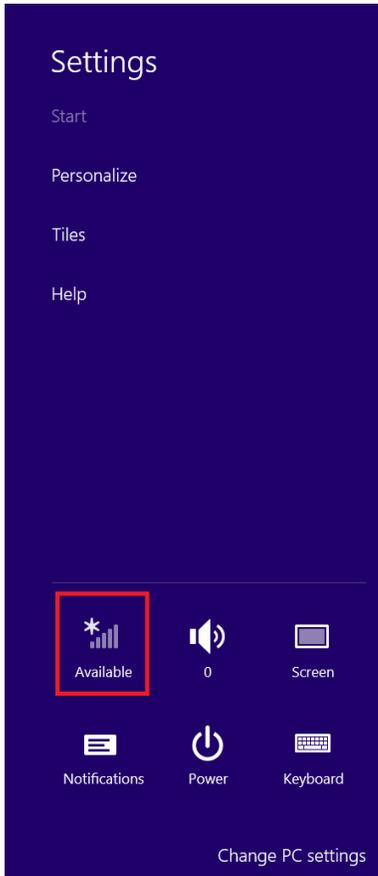

4. Verify "Wi-Fi" is enabled. Click on "nasabyod" in the list of available wireless networks

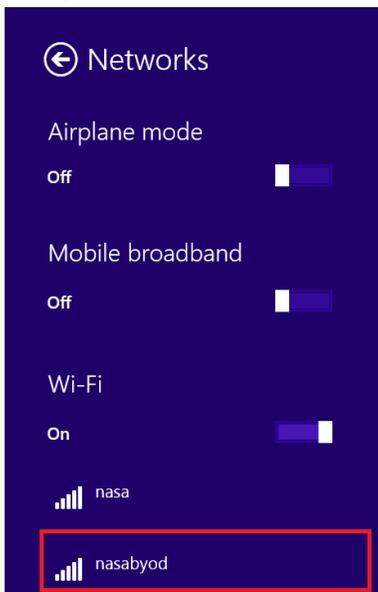


5. Choose whether you would like your device to “Connect Automatically” and click “Connect”

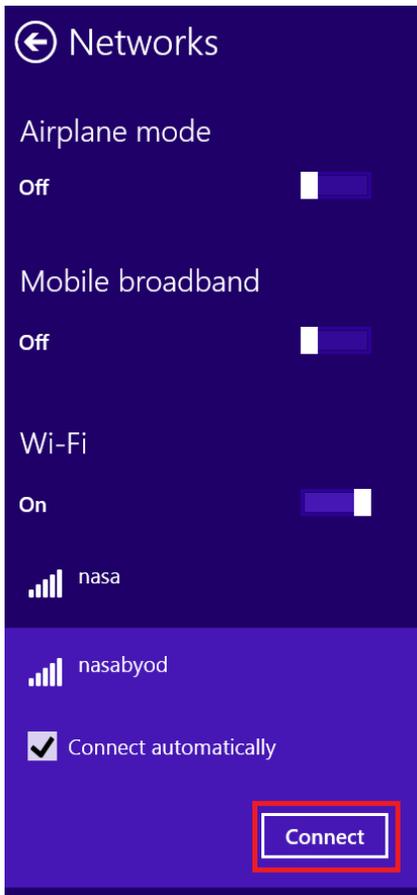


6. Enter your NDC username (without “ndc\” prefix) and password and click “Connect”



7. A confirmation screen may appear asking if you want to continue. Click “Connect” to confirm.
(Note: “nasabyod” only broadcasts within the main JSC campus and off-site contractor locations)

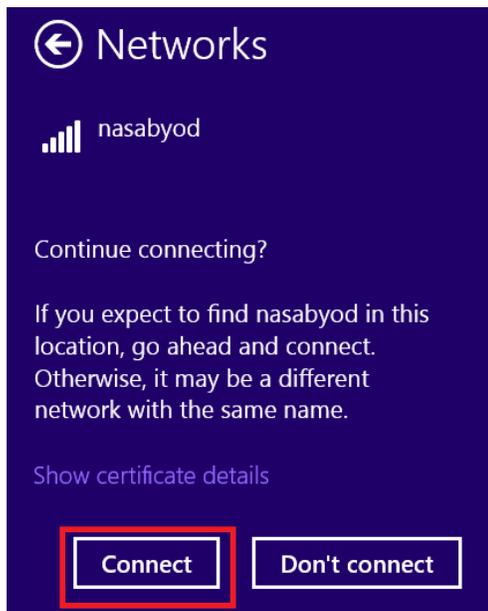

8. After your device successfully connects, the word “Connected” should appear below “nasabyod” in the list of available networks.

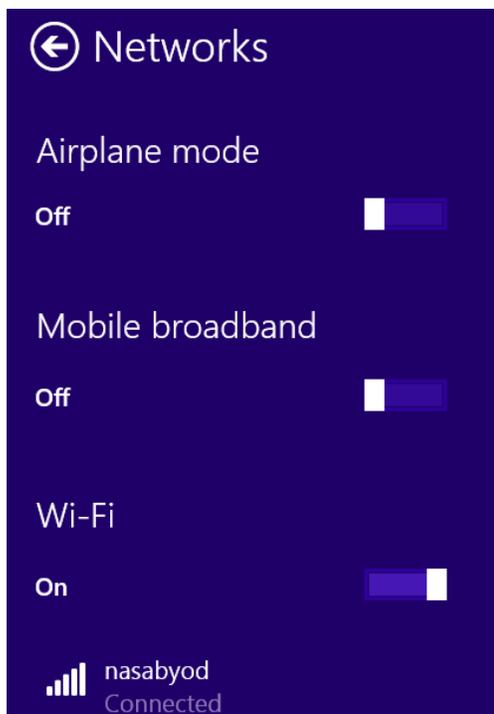

Still Having Trouble Connecting?

- Try removing or “forgetting” any previously saved “nasabyod” wireless network that your device may have remembered and retry these connection steps
- Verify your NDC username and password are correct by logging into NASA Webmail (<http://webmail.nasa.gov/>) on a PC or Mac. These are the same credentials used to connect to “nasabyod”. If you continue to have trouble with your NDC credentials, contact ESD Help Desk at x34800
- Contact your device vendor if you continue to have connection problems.
NOTE: ESD Support can only provide limited support for non-GFE devices