Regolith Beneficiation System for Production of Lunar Calcium and Aluminum

PI: L. Gertsch, Missouri S&T
Team:
F. Rezaei, Missouri S&T
D. Han, Missouri S&T
J. Smith, Missouri S&T
W. Schonberg, Missouri S&T
D. Bayless, Missouri S&T
A. Esbeck *et al*., Bechtel
D. Bergman, Honeybee Robotics
M. Roth, Off Planet Research, LLC

Development Objectives

- Build and demonstrate integrated system for particle size classification and enrichment of anorthite from lunar mare and highland simulants with varying agglutinate fractions.
  - TRL4 → TRL5
  - Output >70 wt% anorthite, particles 20-200 µm
  - Final system <0.51 m^3, 35 kg, 300 watts
  - System throughput ≥3 kg/hr

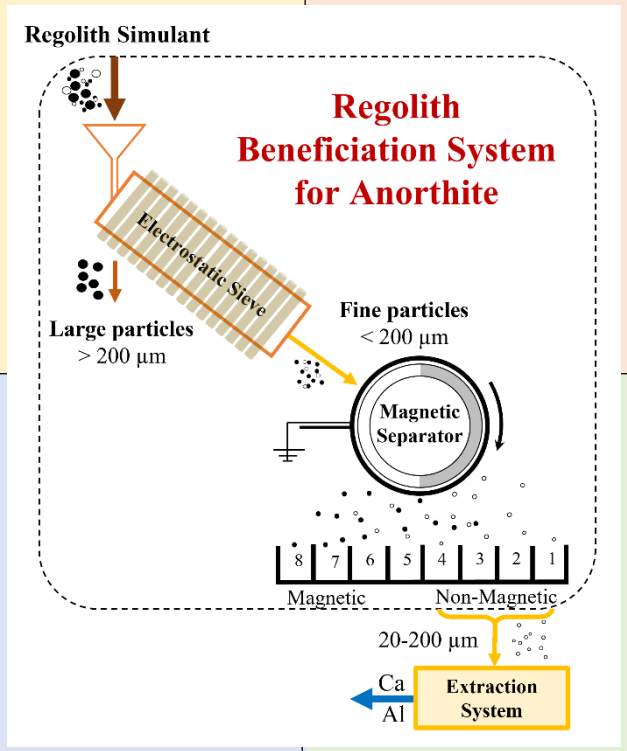

Approach

- Develop and test sub-systems:
  - electrostatic sieve
  - magnetic drum separator
- Under operational conditions:
  - -196°C to 120°C
  - ambient & vacuum pressure
  - representative test materials
- Integrate into complete system, validate vacuum performance
- Optimize size, mass, and power needs of integrated system.

Impact and Infusion

- Enables efficient processing to extract calcium and aluminum from lunar regolith
- Direct application to ISRU and construction materials anywhere on lunar surface
- TRL6 achievable within 2 years
- TRL8 achievable within 5 years