

*FAO*

APOLLO 12	
LM SYSTEMS ACTIVATION CHECKLIST	
PART NO	S/N
SKB32100081-360	1002

LM6

Basic Date October 2, 1969  
Changed          

CSM TO LM TRANSFER LIST(TLC)

Box of Kleenex - LHSSC, Urine Bag

2 Towels - LHSSC, Urine Bag

16 MM Magazines in Bag (6)

70 MM Magazines in Bag (3)

70 MM Magazines HCEX (2) - ISA

Flight Data In Bag:

LM ACTIVATION CHECKLIST

PPK (2)

CWG Connector

Basic Date October 7, 1969

Changed ○

TLC-1

64:10

IVT TO LM

- 1 Activate CABIN DUMP VALVE & Open Hatch  
Take CSM O2 Hose When Transferring
  
- 2 Record Docking Tunnel Index Angle
  

---

- 3 FLOOD LIGHT - A11  
EXTERIOR LTG - OFF  
Window Shades - Down
  
- 4 DES H2O - OPEN  
DES O2 - OPEN  
CABIN REPRESS - AUTO  
CB(16) CABIN REPRESS - Close  
SUIT ISOL (Both) - SUIT FLOW  
SUIT ISOL (Both) - ACTUATE OVERRIDE (SUIT DISC)
  
- 5 Check AOT Visibility

TLC-2

65:46

IVT TO CSM

- 1 DES H2O - CLOSE  
DES O2 - CLOSE  
CABIN REPRESS - CLOSE  
CB(16) CABIN REPRESS - Open  
FLOOD LIGHT - OFF  
Window Shades - Up
  
- 2 CABIN DUMP VALVE - OPEN  
IVT TO CSM  
CLOSE LM HATCH

LM-6

Basic Date \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_

LOI DAY

LM-6

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

ACT-1

\*\*\*\*\* LOS 89:13 \*\*\*\*\*

89:20

LMP IVT TO LM

- 1 Activate CABIN DUMP VALVE & Open Hatch  
Carry Comm Carrier, CWG Connector &  
CSM 02 Hose
- 2 FLOOD LIGHT - All  
Window Shades - Down
- 3 DES H2O - OPEN  
DES 02 - OPEN  
CABIN REPRESS - AUTO  
CB(16) CABIN REPRESS - Close  
LDG ANT - AUTO

LMP IVT TO LM






LM-6

Basic Date October 7, 1969  
Changed                     

ACT-3

INITIAL ACTIVATION STATUS

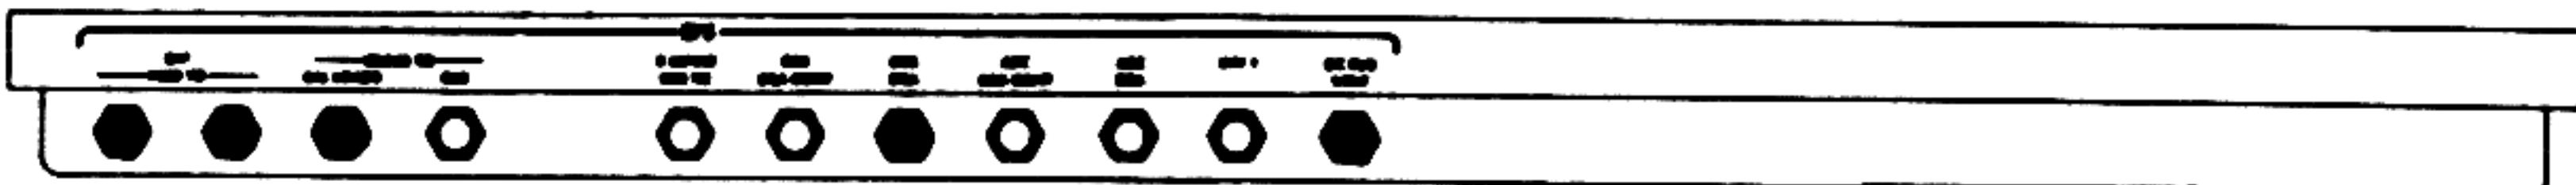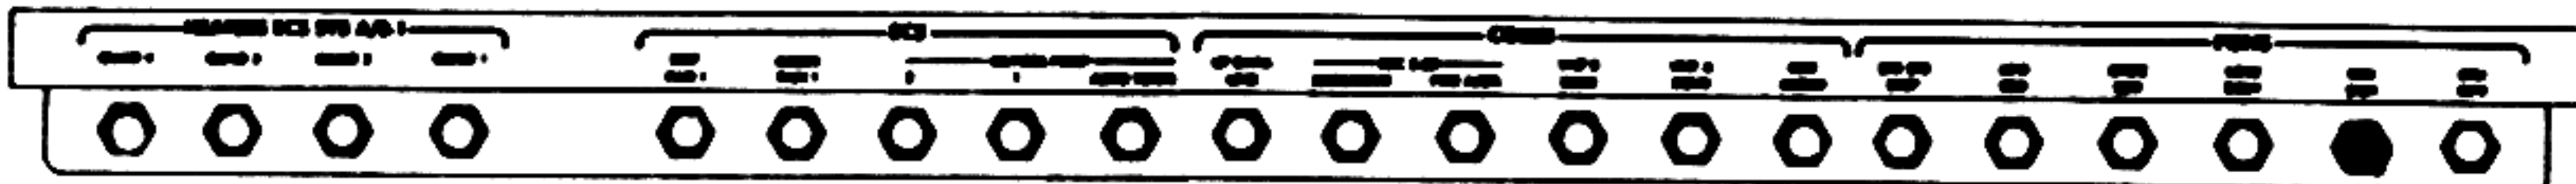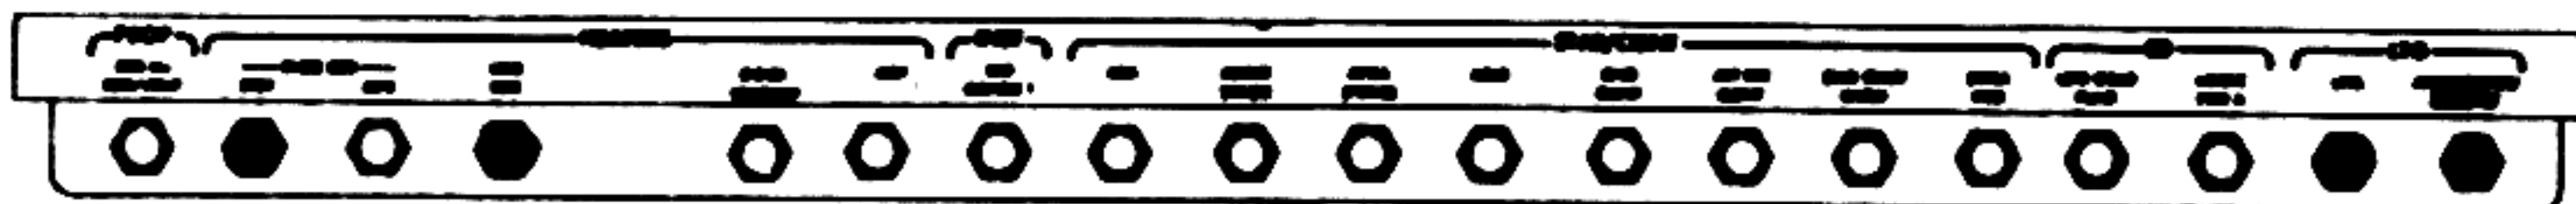





LM-6

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

ACT-5

- 3 RR GYRO SEL - PRIM
- 4 FDAI 1&2 - INRTL  
EARTH/LUNAR - PWR OFF  
LTG - OFF  
MODE - HOLD/FAST  
ALT SET - 60
- 5 DES PROP ISOL-SAFE  
MASTER ARM - OFF  
ASC He SEL - BOTH  
STAGE-SAFE (Guarded)
- 6 S-BAND T/R - OFF  
ICS T/R - OFF  
RELAY - OFF  
MODE-ICS/PTT  
AUDIO CONT - NORM  
VHF A&B - OFF  
VOX SENS - 9  
COAS - OFF  
THUMBWHEEL VOL(5)-6
- 7 TTCA (CDR) - JETS
- 8 TIMER CONT - STOP  
LTG OVERRIDE (3) - OFF  
SIDE PANELS - OFF

ACT-6

FLOOD OVHD/FWD - BRIGHT  
ANUN/NUM - DIM  
INTEGRAL - DIM

- 9 X-POINTER SCALE -HI MULT  
RATE/ERR MON - LDG RDR/CMPTR  
ATTITUDE MON - PGNS  
GUID CONT - PGNS  
MODE SEL - LDG RADAR  
RNG/ALT MON - ALT/ALT RT  
SHFT/TRUN - +50°  
RATE SCALE - 25°/SEC  
ACA PROP - ENABLE  
THR CONT - AUTO  
MAN THROT - CDR  
ENG ARM - OFF  
ATT/TRANSL - 2 JETS  
BAL CPL - ON  
ASC He REG 1&2 - tb-gray (v1v Open)  
DESCENT He REG 1-tb-gray (v1v Open)  
DESCENT He REG 2-tb-bp (v1v Closed)  
PRPLNT QTY MON - OFF  
PRPLNT TEMP/PRESS MON - ASC  
HELIUM MON - OFF  
ABORT and ABORT STAGE - Flush/Guarded

LM-6

Basic Date \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_

Basic Date October 7, 1969Changed       

## ACT-7

- 10 SYS A&B ASC FUEL & ASC OXID(4) -tb-bp  
(Feed 2-Close, Feed 1-Open)  
SYS A&B QUADS (8)-tb-gray (v1v open)  
CRSFD -tb-bp (v1v closed)  
SYS A&B MAIN SOV - tb-gray (v1v open)  
TEMP/PRESS MON - He  
ACA PROP (2) - ENABLE  
RATE/ERR MON - LDG RDR/CMPTR  
ATTITUDE MON - AGS  
GLYCOL - PUMP 2  
SUIT FAN - 1  
O2/H2O QTY MON - ASC 2
- 11 ENG GMBL - ENABLE  
DES ENG CMD OVRD - OFF  
LDG ANT - AUTO  
RADAR TEST - OFF  
TEST MONITOR - ALT XMTR  
SLEW RATE - HI  
RNDZ RDR - SLEW  
DEAD BAND - MIN  
GYRO TEST - ROLL  
ATTITUDE CONTROL (3) - MODE CONT  
MODE CONT: (Both) - OFF  
EVENT TIMER: TIMER CONT - STOP  
TEMP MON - LDG  
RCS SYS A/B-2 QUADS - OFF

ACT-8

LTG: SIDE PANELS - OFF  
FLOOD-ALL  
OVHD/FWD - BRIGHT  
EXTERIOR LTG - OFF  
LAMP/TONE TEST - OFF  
X-POINTER SCALE - HI MULT

12 ACA/4 JET (2) - ENABLE  
TTCA/TRANSL (2) - ENABLE  
RDZ ANT RELEASE - Stowed  
AOT - CL, ANGLE - 0000 (Pushed In)  
TTCA (LMP) - JETS  
AGS STATUS - OFF

13 PWR TEMP MON-ED/OFF  
INV-OFF  
DES PWR (5)-tb-bp  
ASC PWR (4)-tb-bp  
UPLINK SQUELCH-ENABLE

14 AUDIO CONT - NORM  
S-BAND T/R - OFF  
ICS T/R - OFF  
RELAY - OFF  
MODE - ICS/PTT  
UPDATA LINK - OFF  
VHF A&B - OFF  
VOX SENS - 9  
THUMBWHEEL VOL(5)-6

LM-6

Basic Date October 7, 1969  
Changed \_\_\_\_\_

Basic Date October 7, 1969  
Changed     

## ACT-7

- 10 SYS A&B ASC FUEL & ASC OXID(4) -tb-bp  
(Feed 2-Close, Feed 1-Open)  
SYS A&B QUADS (8)-tb-gray (v1v open)  
CRSFD -tb-bp (v1v closed)  
SYS A&B MAIN SOV - tb-gray (v1v open)  
TEMP/PRESS MON - He  
ACA PROP (2) - ENABLE  
RATE/ERR MON - LDG RDR/CMPTR  
ATTITUDE MON - AGS  
GLYCOL - PUMP 2  
SUIT FAN - 1  
O2/H2O QTY MON - ASC 2
- 11 ENG GMBL - ENABLE  
DES ENG CMD OVRD - OFF  
LDG ANT - AUTO  
RADAR TEST - OFF  
TEST MONITOR - ALT XMTR  
SLEW RATE - HI  
RNDZ RDR - SLEW  
DEAD BAND - MIN  
GYRO TEST - ROLL  
ATTITUDE CONTROL (3) - MODE CONT  
MODE CONT: (Both) - OFF  
EVENT TIMER: TIMER CONT - STOP  
TEMP MON - LDG  
RCS SYS A/B-2 QUADS - OFF

Basic Date October 7, 1969Changed          

## ACT-9

- 15 S-BAND MODULATE - PM  
XMTR/RCVR - OFF  
PWR AMPL - OFF  
VOICE - OFF  
PCM - OFF  
RANGE - OFF/RESET  
VHF A - OFF (SQUELCH-3)  
VHF B - OFF (SQUELCH-3)  
TELEMETRY - OFF/HI  
RECORDER - OFF  
VHF - AFT  
TRACK MODE - OFF  
PITCH - -75°  
YAW - -12°  
S-BAND - AFT
- 16 SUIT GAS DIVERTER - Pull/EGRESS  
CABIN REPRESS - AUTO  
PLSS FILL - CLOSE  
PRESS REG A&B - CLOSE  
DES 02 - OPEN  
ASC 02(2)-CLOSE  
SUIT ISOL (2) - SUIT DISC  
SUIT CIRCUIT RELIEF - AUTO  
CABIN GAS RETURN - AUTO  
CO2 CANISTER SEL - PRIM  
PRIM & SEC CO2 CANISTER - CLOSE  
WATER SEP SEL - PULL/SEP 2

ACT-10

ASC H2O - CLOSE  
SEC EVAP FLOW - CLOSE  
PRIM EVAP FLOW (2)-CLOSE  
DES H2O-OPEN  
WATER TANK SELECT -DES  
SUIT TEMP - COLD  
LIQUID COOLING GARMENT -COLD

17 Verify (192 PKG) Lanyard  
Not Seated

18 FWD CABIN RELIEF AND DUMP - AUTO

89:30

HOUSEKEEPING

- 1 Unsnap LMP's HSB And Stow Next To  
CDR's HSB On Floor Velcro. Unsnap  
CDR's HSB
- 2 Unstow 70mm Film Bag (Top Left  
of RHSSC)  
Unstow 16mm Bag, Remove 1 Mag,  
Stow Bag (Top Right Of LHSSC), Install  
16mm Mag, CEX (f11,250,7) 6 fps
- 3 Put Up Snap Straps

LM-6

Basic Date \_ October 7, 1969  
Changed October 22, 1969



Basic Date            October 7, 1969

Changed           

ACT-11

\*\*\*\*\* SR 89:37 \*\*\*\*\*

\*\*\*\*\* AOS 90:03 \*\*\*\*\*

90:30

COMM ACTIVATION

- 1 Transfer To LM POWER (FLOOD Lts. Blink,  
C/W PWR Caution Lt - On)  
GET            :            :  
CB(11) EPS: XLUNAR BUS TIE - Close  
CB(16) EPS: XLUNAR BUS TIE - Close  
Activate Utility Lights
- 2 CB(11) COMM: VHF B XMTR - Close  
          : VHF A RCVR - Close  
          : CDR AUDIO-Close  
INST: SIG CONDR 1 - Close  
ECS: GLYCOL PUMP 2 - Close
- 3 CB(16) INST: SIG CONDR 2-Close  
          EPS: DISP - Close  
          : DES ECA CONT-Close

ACT-12

COMM ACT & C/O

Verify DES BATS tb(4) - LO, DES BATS-tb-gray  
PWR/TEMP MON - Check Voltages  
CB(16)EPS: CROSS TIE BAL LOADS - Open

When  $< 27V$ , Select HI Voltage Taps  
BAT 1 HI VOLTAGE - OFF/RESET  
BAT 1 HI VOLTAGE - ON  
Repeat For BATS 2,3,4  
CB(16) EPS: CROSS TIE BAL LOADS - Close

- 4 CB(16) COMM: DISP - Close
  - : VHF A XMTR - Close
  - : VHF B RCVR - Close
  - : PRIM S-BD(2) - Close
  - : PMP - Close
  - INST: SIG SENSOR - Close
  - : PCM/TE - Close
  - ECS: DISP - Close
- 5 Connect To LM COMM Umbilical Using CWG Connector
- 6 CB(16) SE AUDIO - Close

LM-6

Basic Date. , \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_ October 20, 1969

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

ACT-13

90:40\* S-BAND/VHF SIMPLEX VOICE TEST

- 1 AUDIO (LMP): S-BAND T/R - T/R  
: VHF A - T/R  
: VHF B - OFF  
COMM: S-BAND-PM, PRIM, PRIM, DN VOICE BU,  
PCM, OFF/RESET, OFF, LO  
VHF A XMTR - VOICE  
VHF A RCVR - ON  
S-BAND ANT - AFT  
Perform VHF A Voice Check With CSM
- 2 COMM: VHF A XMTR & RCVR - OFF  
: VHF B XMTR - VOICE  
: VHF B RCVR - ON  
AUDIO (LMP): VHF A-OFF  
: VHF B-T/R  
Perform VHF B Voice Check With CSM
- 3 Perform S-BD Voice & LBR Check With MSFN  
TLM-HI  
Perform Voice & HBR Check With MSFN
- 4 BIOMED-RIGHT  
Perform Voice & HBR Check With MSFN

ACT-14

- 5 TLM-LO  
Perform Voice & LBR Check With MSFN
- 6 S-BAND: VOICE-VOICE  
Perform Voice & LBR Check With MSFN
- 7 TLM-HI  
Perform Voice & HBR Check With MSFN
- 8 TLM-LO  
S-BAND: RANGE-RANGE  
Perform Voice & Ranging Check With MSFN

SS 90:51

90:55

OPS CHECKOUT

- 1 Perform OPS Checkout  
Read And Record Source Pressures  
CDR OPS \_\_\_\_\_  
  
LMP OPS \_\_\_\_\_

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

ACT-15

91:00COMM DEACTIVATION

- 1 AUDIO (LMP): S-BAND T/R - OFF  
: VHF B - OFF
- 2 COMM: S-BAND - PM, OFF, OFF, OFF, OFF,  
OFF/RESET, OFF, LO  
: VHF B XMTR - OFF  
: VHF B RCVR - OFF
- 3 CB(16) EPS: CROSS TIE BAL LOADS-Open  
Select LO TAPS
- 4 Verify CB Status Per INT ACT STATUS  
Chart (ACT 3,4)  
Disconnect From LM Comm Umbilical  
UTILITY Lts - OFF  
CB(11) LTG: UTIL - Open
- 5 Transfer To CSM Power, Observe C/W  
PWR Lt - Off  
GET \_\_\_\_:\_\_\_\_:\_\_\_\_

IVT TO CSM

ACT-16

91:10

LMP IVT TO CSM

- 1 DES 02 - CLOSE  
DES H20 - CLOSE  
CABIN REPRESS - CLOSE  
CB(16) ECS: CABIN REPRESS - Open  
Window Shades - Up
- 2 FLOOD LIGHT - OFF  
Check AOT Visibility
- 3 CABIN RELIEF & DUMP (OVHD) - Open  
IVT TO CSM, Close LM Hatch

\*\*\*\*\*  
LOS 91:11 \*\*\*\*\*

LM-6

Basic Date:            October 7, 1969  
Changed

LM-6

Basic Date \_\_\_\_ . October 7, 1969  
Changed \_\_\_\_

**DOI DAY**

LM-6

Basic Date ~~\_\_\_\_\_~~ October 2 1969  
Changed ~~\_\_\_\_\_~~ \_\_\_\_\_

CSM TO LM TRANSFER LIST (DOI)

Suits And Ancillary Eqpt:	Personal Radiation Dosimeter
Liners & Extra Set	Monocular - RHSSC (Fecal Comp.)
IV Gloves	Flight Data In Bag:
Helmet	LM LUNAR SURFACE MAPS
Bio belt & Instrumentation	LM STRIPS CHART
Comm Cap	LM TIMELINE BOOK
Wristwatch (2)	CWG CONNECTOR
Sunglasses in pouch	
Pens & Pencils	
Penlight	
Scissors	



LM-6

Basic Date            October 7, 1969  
Changed                       October 31, 1969

ACT-17

\*\*\*\*\* SR 103:27 \*\*\*\*\*

\*\*\*\*\* AOS 103:47 \*\*\*\*\*

\*\*\*\*\* UD - 4:00 (103:54) \*\*\*\*\*

L 103:54  
O  
I LMP IVT TO LM

- 1 Activate CABIN DUMP VALVE & Open Hatch  
Carry Comm Carrier, CWG Connector,  
& Monocular (Stow In RHSSC In TSB)  
Mount TSB
- 2 Verify Docking Tunnel Index  
Angle (See TLC-1)  
Window Shades - Down
- 3 Transfer To LM PWR  
GET           :          :            
(FLOOD Lts. BTnk, C/W PWR Caution Lt-On)  
CB(11) EPS: XLUNAR BUS TIE - Close  
CB(16) EPS: XLUNAR BUS TIE - Close

IVT TO LM  
EPS ACT

ACT-18

- 4 FLOOD LIGHT - All  
CB(11) LTG UTIL: Close  
Activate Utility Lts
  
- 5 DES H2O - OPEN  
DES O2 - OPEN  
CABIN REPRESS - AUTO  
CB(16) ECS: CABIN REPRESS - Close

L            104:10  
O  
I            EPS ACTIVATION

- 1 LTG: ANUN/NUM - BRIGHT (1 Caution, 9  
Power Failure, 1 COMP Lt - On)
  
- 2 CB(11) INST: SIG CONDR 1 - Close  
          EPS: DES ECA CONT- Close  
CB(16) INST: SIG SENSOR - Close  
          : PCM/TE - Close  
          : SIG CONDR 2 - Close  
          EPS: DISP - Close  
          : DES ECA CONT -Close
  
- 3 Connect To LM Comm Umbilical Using CWG  
Connector

Basic Date \_\_\_\_\_ October 7, 1969  
 Changed \_\_\_\_\_ October 22, 1969

ACT-19

AUDIO (LMP): S-BAND T/R - T/R  
 : ICS - T/R

CB(16) COMM: DISP - Close  
 : S.E. AUDIO-Close  
 : PRIM S-BD(2)-Close  
 : S-BD ANT - Close  
 : PMP-Close

S-BAND - PM,PRIM,PRIM,VOICE,PCM,RANGE,  
 OFF,LO

S-BAND ANT - FWD

Perform COMM Check with MSFN

- 4 Verify BAT 1,2,3,4 - tb-LO  
 DES BATS tb-gray  
 BATS 5&6 NORMAL & BACKUP (4)-tb-bp  
 Check BAT and BUS Voltages  
 CB(16) EPS: CROSS TIE BAL LOADS - Open

When BUS Volts  $\leq 27V$ , Select High Voltage  
 Taps

BAT 1 HI VOLTAGE-OFF/RESET

BAT 1 HI VOLTAGE-ON

Repeat for BATS 2,3,4

- 5 CB(11) AC BUS B&A: BUS TIE INV 2&1(4) -  
 Close  
 : AC BUS VOLT(1)-Close  
 EPS: INV 1 - Close  
 CB(16) EPS: INV 2 - Close

ACT-20

6 POWER/TEMP MON - AC BUS  
INV -1 Then 2  
Verify Voltage in GREEN Band  
CB(11) EPS: INV 1 - Open

L 104:14  
O

I MISSION TIMER ACTIVATION

1 CB(11) AC BUS B: NUM LTG - Close  
FLIGHT Displays: MISSION TIMER-Close  
Set MSN TMR On CSM Mark

L 104:16  
O

I PRIMARY GLYCOL LOOP ACTIVATION

1 CB(16) ECS: DISP - Close  
GLYCOL - PUMP 1 \_\_\_\_\_ psia  
- INST(SEC) \_\_\_\_\_ psia  
- PUMP 2  
CB(11) ECS: GLYCOL PUMP AUTO TRNFR-Close  
: GLYCOL PUMP 1 - Close  
: GLYCOL PUMP AUTO TRNFR-Open  
GLYCOL - PUMP 1  
CB(11) ECS: GLYCOL PUMP 2 - Close

Basic Date October 7, 1969  
 Changed November 3, 1969

ACT-21

L  
O  
I104:18CAUTION/WARNING CHECKOUT

- 1 CB(16) LTG: MASTER ALARM - Close  
 INST: CWEA - Close

<u>WARN</u>	<u>CAUT</u>	<u>COMP</u>
ASC PRESS	PREAMP	H2O SEP
CES AC	HEATER	
CES DC	ECS	
LGC	GLYCOL (On If Temp >50°)	

RCS A REG

RCS B REG

(ASC PRESS Lt-On Thru Descent)

CB(16) LTG: ANUN/DOCK/COMPT - Close

STAB/CONT: ATCA - Close

HEATER: DISP - Close

CB(11) STAB/CONT: ENG CONT - Close

- 2 RCS SYS A/B-2: QUADS(4) - AUTO  
 HTR TEMP MONITOR - Cycle Then LDG  
 (HEATER Lt - Off)  
 LAMP/TONE TEST - Check All Positions

- 3 PRIM EVAP FLOW No 1 - OPEN

- 4 Select HI Voltage Taps  
 Close CB's Per ACTIVATION PWR UP Chart

---


 C/W CHECKOUT

# C/W CHECKOUT

L  
O  
I

ACT-22

ACTIVATION PWR UP

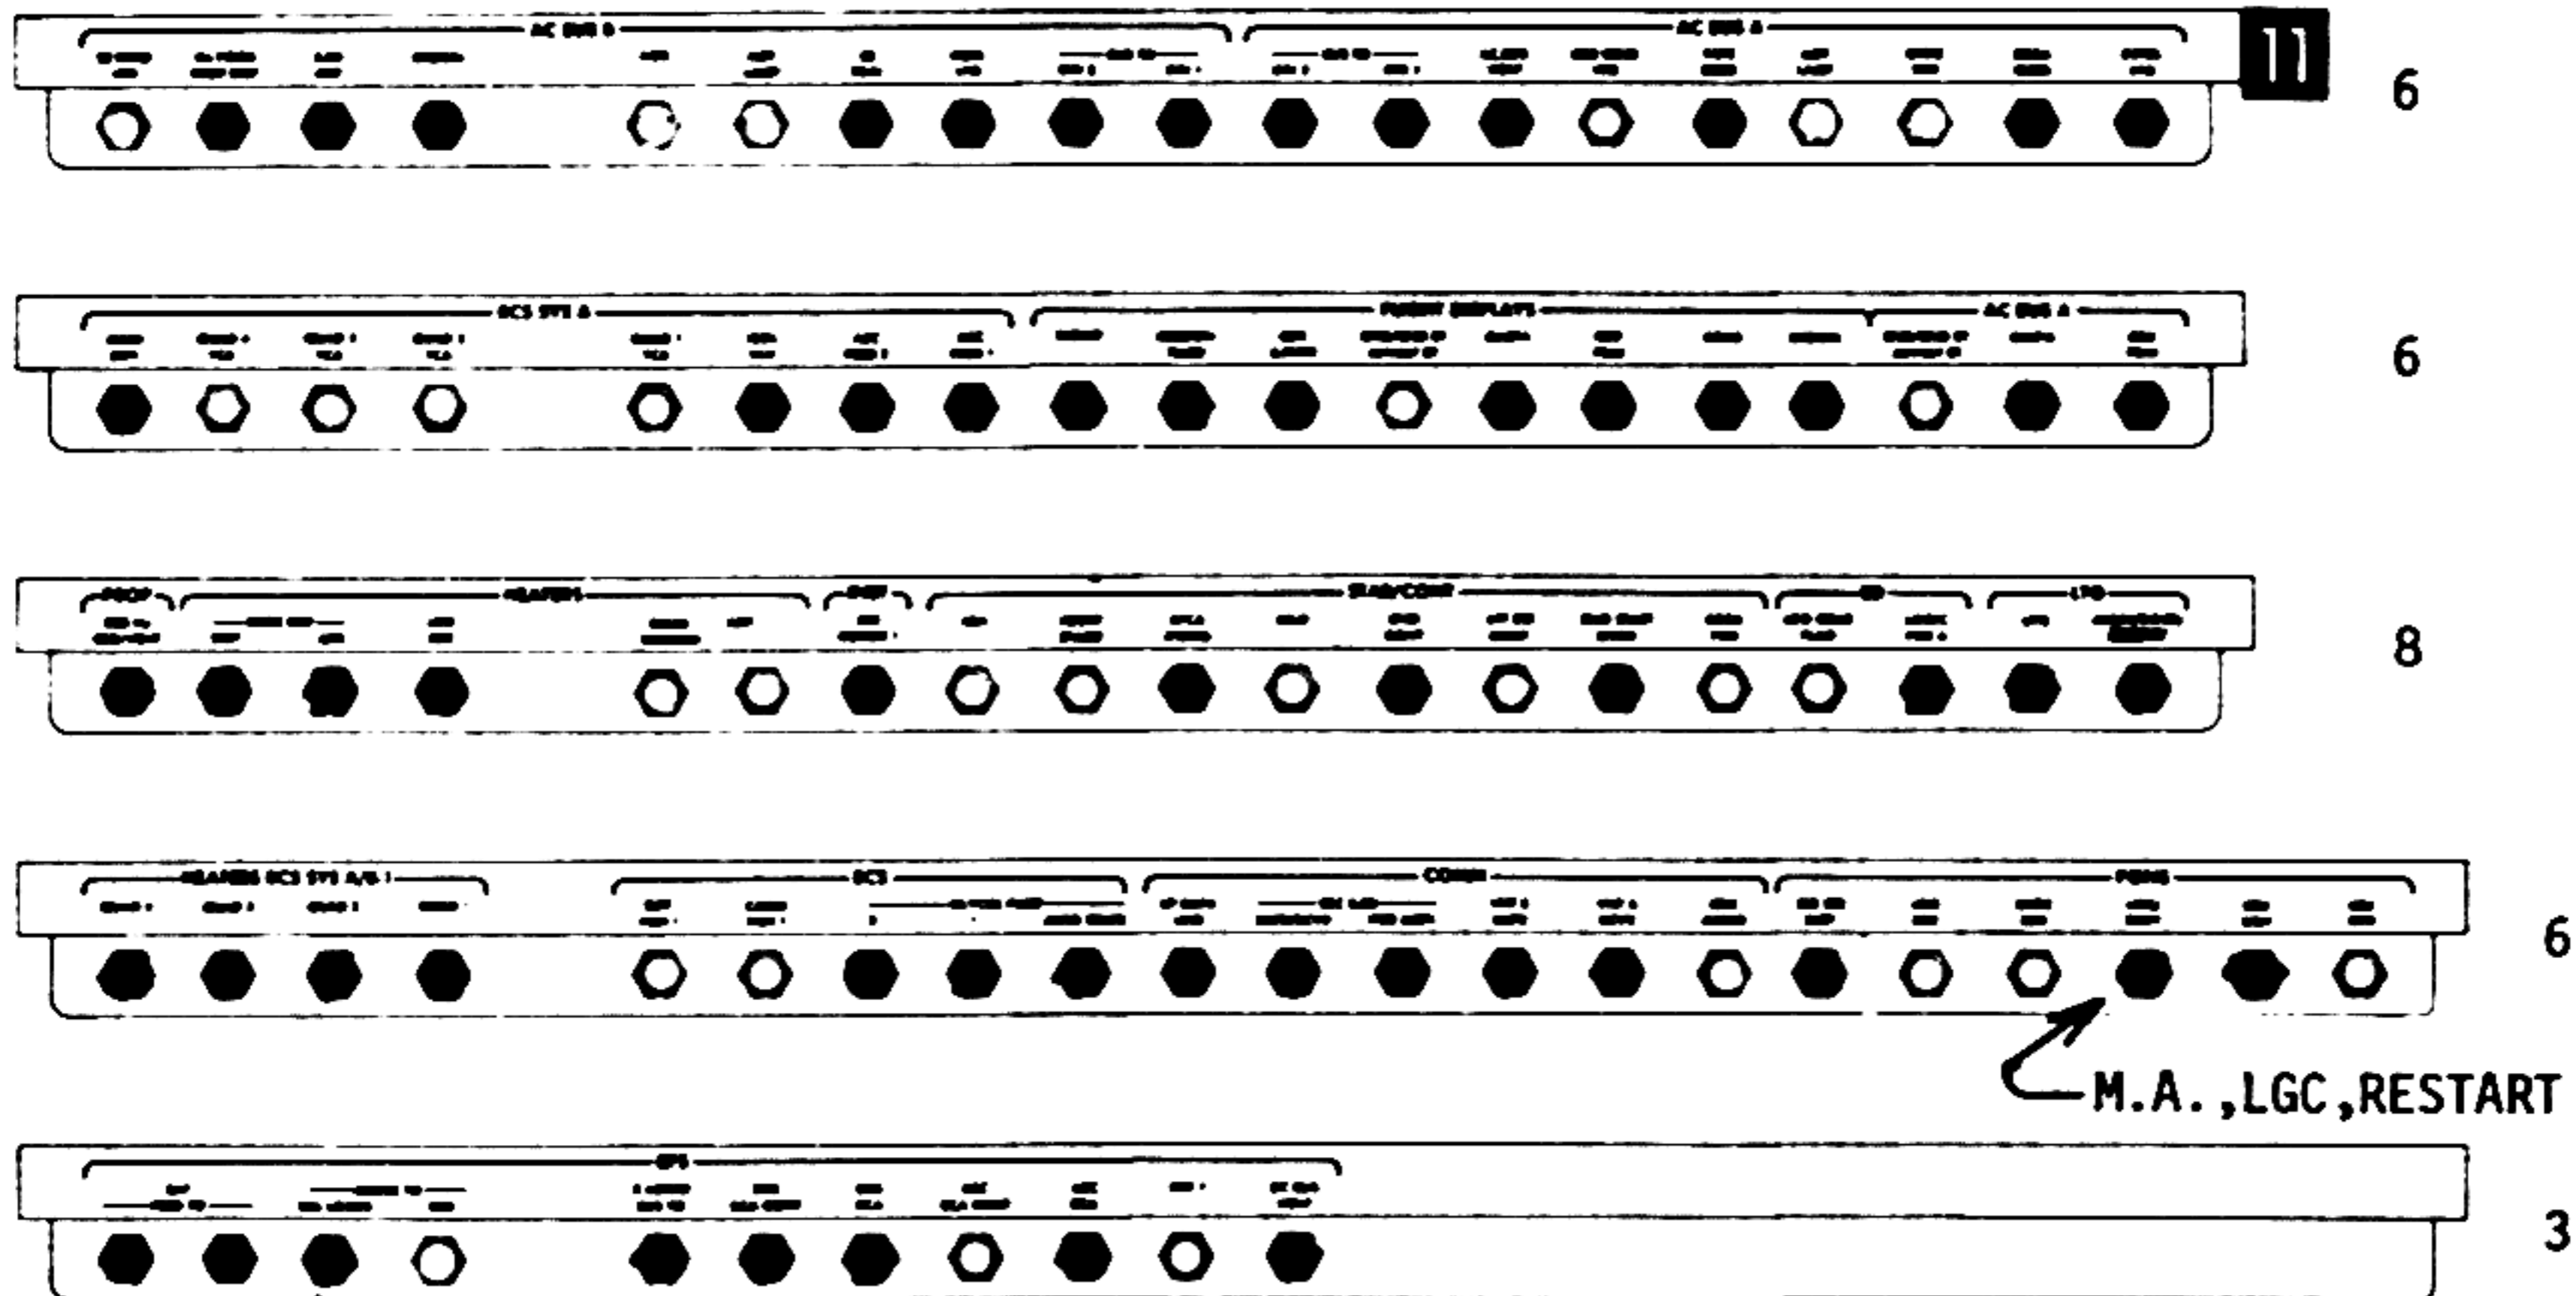

Basic Date October 7, 1969  
Changed \_\_\_\_\_


LM-6

Basic Date October 7, 1969  
Changed ○

L  
O  
I

ACT-23

ACTIVATION PWR UP

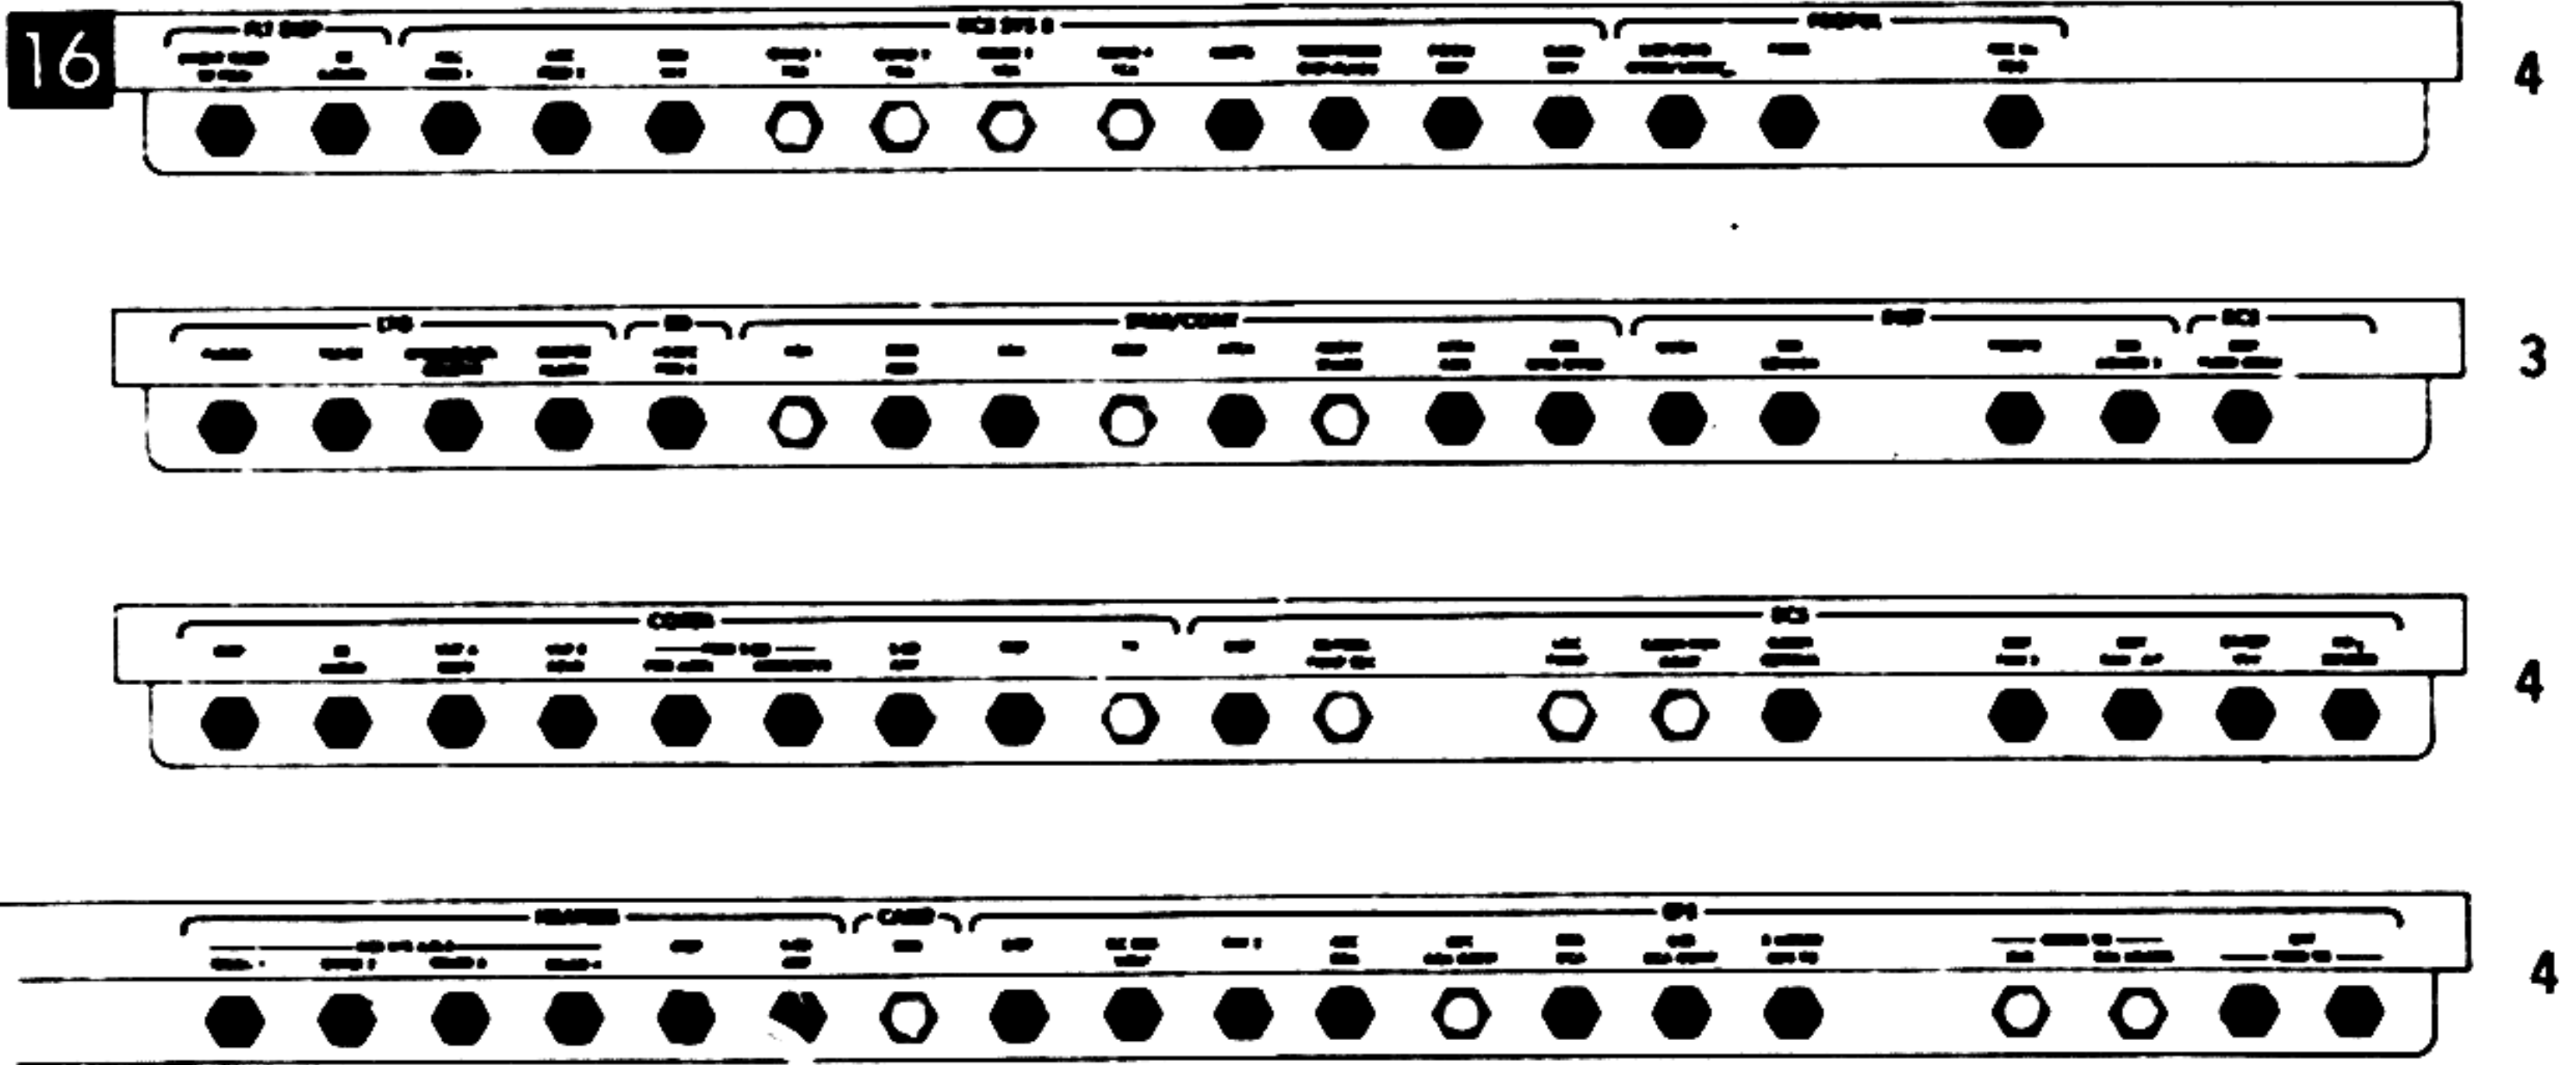

CDR IVT TO LM

\*\*\*\*\*UD - 3:30 (104:24)\*\*\*\*\*

104:27

104:27

CDR IVT To LM With  
Helmet & Gloves

TB VERIFICATION

- 1 CB(16) INST: CWEA - Open Then Close  
Cycle TEMP MON  
  

<u>WARN</u>	<u>CAUT</u>	<u>COMP</u>
RCS A REG	ECS	H2O SEP
RCS B REG		SUIT FAN
- 2 FUEL & OXID VENT (2) -tb -gray  
LDG GEAR DEPLOY - tb-bp
- 3 ASCENT He REG 1&2 -tb-gray  
DESCENT He REG 1-tb-gray  
DESCENT He REG 2 -tb-bp
- 4 SYS A&B ASC FUEL & OXID (4)-tb-bp  
SYS A&B QUADS (8) - tb-gray  
CRSFD tb-bp  
SYS A&B MAIN SOV -tb-gray
- 5 RECORDER - OFF - tb-bp

Basic Date\_\_ \_\_\_\_October 7, 1969  
Changed \_\_\_\_\_November 3, 1969



ACT-25

104:29

\* SEC S-BAND T/R AND PWR AMPL CHECK

- 1 Notify MSFN of SEC S-BD Check  
S-BAND XMTR/RCVR - SEC  
S-BAND PWR AMPL - SEC  
(Up To 60 sec To Relock)

- 2 Perform Comm Check (With MSFN)

- 3 S-BAND XMTR/RCVR - PRIM  
S-BAND PWR AMPL - PRIM  
(Up To 60 sec To Relock)

104:32

- L  
O  
I ECS ACTIVATION & CHECKOUT
- 1 02/H2O QTY MON - ASC 2, ASC 1, DES
- 2 SUIT ISOL (2) - SUIT FLOW  
SUIT ISOL (2)-ACTUATE OVRD (Suit Disc)  
SUIT GAS DIVERTER - PUSH/CABIN

L  
O  
I

104:32

\* S-BAND STEERABLE ANTENNA ACTIVATION

- 1 HTR CONT TEMP MONITOR - S-BAND  
(-52° to +135°)  
S-BAND -PM,PRIM,PRIM,VOICE,PCM,  
RANGE,OFF,HI  
CSM Mnvr To Proper Attitude

S-BD ANT ACT  
ECS ACT

S-BD ANTACT  
ECS ACT

ACT-26

3  
L  
O  
I  
1  
2

SUIT FAN - 2 (Master Alarm (Twice),  
SUIT/FAN Warning Lt-On &  
SUIT FAN Comp Lt-On  
Momentarily, ECS Caution,  
H2O SEP Comp Lts - ON  
Then Off In 2 Min)

104:34

CDR CONNECT TO LM ECS

1 Connect To CDR Hoses  
(Stow Gas Connector Plugs In TSB)  
SUIT ISOL - SUIT FLOW  
Verify (192 PKG) Lanyard Stopper Not  
Seated  
CB(16) ECS: LCG PUMP - Close  
PRESS REG A - EGRESS (Suit Gas Diverter  
Automatically Extends)

2 Connect To LM Comm Umbilical  
CB(11) COMM: CDR AUDIO - Close  
AUDIO (CDR): S-BAND T/R  
: ICS - T/R

- 2 HI GAIN: PITCH - -75°  
YAW - -12°  
TRACK MODE - SLEW (Wait 30 sec)  
PITCH (From MSFN) \_\_\_\_\_ (+68°)CCW  
YAW (From MSFN) \_\_\_\_\_ (+19°)CCW  
ANTENNA S-BAND - SLEW
- 3 Verify Signal Strength (> 3.0)  
TRACK MODE - AUTO (>3.8)
- 4 S-Band Check With MSFN

Basic Date October 7, 1969  
Changed October 22, 1969

L  
O  
I104:37104:37PGNS TURN-ON & SELF TESTSUIT FAN/H2O SEP CHECK

1 Check Bus Voltages

1 CB(16) ECS: SUIT FAN 2 - Open  
(Master Alarm, SUIT/FAN Warning  
SUIT FAN Comp Lts - On)2 CB(11) PGNS: IMU OPR - Close  
NO ATT Lt - On (90 sec)2 CB(11) ECS: SUIT FAN 1-Close  
H2O SEP SEL-PUSH SEP 1

3 V35E

F 88 88

(Master Alarm, LGC Warning, ISS  
Warning And All DSKY Lts - On,  
8's In All Registers; Lts And  
DSKY Reset In 5 sec)3 SUIT FAN - 1 (SUIT/FAN Warning,  
FAN Comp Lts-Off, ECS Caution,  
H2O SEP Comp Lts -Off In 2 min)  
CB(16) ECS: SUIT FAN 2 - Close

NO ATT Lt - Off, Wait 20 sec

RSET

V37E 00E

104:40

4 V25 N01E 1365E

E,E,E

GLYCOL PUMP CHECK

5 V15 N01E 1365E

R1,R2,R3 All Zero

1 CB(11) ECS: GLYCOL PUMP 1 - Open  
(Master Alarm, ECS Caution  
Lt - On Momentarily)  
CB(11) ECS: GLYCOL PUMP 1 - Close  
(GLYCOL Comp Lt-On)

6 V21 N27E 10E (Test

Fixed And Erasable Memory)

ACT-28

R1 Number Of Errors  
R2 Number Of Tests Started  
R3 Number Of Tests Successful  
(Test Successful If R2  $\geq$  3 Within  
78 sec)

```
*PROG Lt-On *
* V05 N09E 01102 SELF-*
* TEST ERROR *
* N08E Record For MSFN *
* *
* R1 _____ *
* *
* R2 _____ *
* *
* R3 _____ *
```

```
2 GLYCOL - INST (SEC) (8 psia)
  CB(16) ECS: GLYCOL PUMP SEC - Close
    (10-20 psi Rise)
    : GLYCOL PUMP SEC - Open

3 GLYCOL - PUMP 2 (21-37 psi)
  (GLYCOL Comp Lt - On Then Off)
  CB(11) ECS: GLYCOL PUMP AUTO
    TRNFR-Open
  GLYCOL - PUMP 1 (21-37 psi)
```

V21 N27E OE TERMINATE SELF TEST

\*\*\*\*\* SS 104:40 \*\*\*\*\*

Basic Date, \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_

ACT-28

R1 Number Of Errors  
R2 Number Of Tests Started  
R3 Number Of Tests Successful  
(Test Successful If R2  $\geq$  3 Within  
78 sec)

\*PROG Lt-On \*  
\* V05 N09E 01102 SELF-\*  
\* TEST ERROR \*  
\* N08E Record For MSFN \*  
\* \*  
\* R1 \_\_\_\_\_ \*  
\* \*  
\* R2 \_\_\_\_\_ \*  
\* \*  
\* R3 \_\_\_\_\_ \*

2 GLYCOL - INST (SEC) (8 psia)  
CB(16) ECS: GLYCOL PUMP SEC - Close  
(10-20 psi Rise)  
: GLYCOL PUMP SEC - Open  
  
3 GLYCOL - PUMP 2 (21-37 psi)  
(GLYCOL Comp Lt - On Then Off)  
CB(11) ECS: GLYCOL PUMP AUTO  
TRNFR-Open  
GLYCOL - PUMP 1 (21-37 psi)

7 V21 N27E OE TERMINATE SELF TEST

\*\*\*\*\* SS 104:40 \*\*\*\*\*

Basic Date. \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_

LM-6

Basic Date October 7, 1969  
Changed NOVEMBER 5, 1969

ACT-29

104:41

\*LGC/CMC CLOCK SYNC/TEPHEM UPDATE

V25 N36E

Load CSM Time \_\_\_\_\_:\_\_\_\_\_:\_\_\_\_\_

On CSM Mark - ENTR

V06 N65E - Compare With CSM N65

V55E - Load ΔT

Check Mission Timer

CSM Read TEPHEM

R1 \_\_\_\_\_

R2 \_\_\_\_\_

R3 \_\_\_\_\_

V25 N01E, 1706E Load TEPHEM (Octal)

V05 N01E, 1706E Verify TEPHEM

V21N01E, 1462E, 576E

Verify MSFN Contact

V74E (Erasable Dump) (42 Sec)

L 104:42

O

I \*VHF B CHECKOUT

- 1 CSM Configure For VHF Simplex B  
VHF B XMTR - VOICE  
VHF B RCVR - ON  
VHF ANT - FWD  
AUDIO (Both): VHF B - T/P

- 2 Both CDR & LMP Perform Voice Check On VHF Simplex B

L 104:43

O

I \*VHF A CHECKOUT

- 1 CSM Configure For VHF Simplex A  
VHF A XMTR - VOICE  
VHF A RCVR - ON  
VHF B XMTR - OFF  
TLM - HI  
AUDIO (Both): VHF B - RCV  
: VHF A - T/R

- 2 Both CDR & LMP Perform Voice Check On VHF Simplex A

VHF CHECKOUT

101

VHF CHECKOUT

ACT-30

104:46

104:46

DOCKED IMU COARSE ALIGN

1

CB(16) COMM: SE AUDIO - Open  
Disconnect From LM Comm Umbilical  
CB(16) COMM: SE AUDIO - Close  
LMP IVT TO CSM

Verify CSM In Min DEADBAND ATT HOLD

Calculate LM Gimbal Angles

<u>OG</u>	<u>IG</u>	<u>MG</u>
<u>300.00</u>	<u>180.00</u>	<u>360.00</u>
_____ +RC (See TLC-1)		
<u>240.0</u> -CM	<u>270.0</u> +CM	<u>00.0</u> -CM
<u>060.0</u> LM	<u>090.0</u> LM	<u>00.0</u> LM

V41 N20E COARSE ALIGN IMU

F 21 22 LOAD IC DU ANGLES OG,IG,MG (.01°)

(NO ATT Lt - On, FDAI Torques)

\*PROG Lt-On \*

\*V05 N09E 00211 COARSE \*

\* ALIGN ERROR, Go\*

\* To 3 \*

Basic Date            October 7, 1969

Changed            October 31, 1969

ACT-31

4 V40 N20E ZERO CDU (NO ATT Lt-Off)  
Notify CSM ATT HOLD No Longer Required

5 V25 N07E  
F 21 07 SET REFSMFLG  
77E,10000E,1E, VO1 N01E,77E Confirm Bit 13 Is Set  
(Set If 1st Digit Is 1,3,5 or 7)

6 V37E 51E  
PRO  
V37E 00E

7 VG6 N20 On LM MARK - ENTR  
Note Time; Copy CSM & LM OG, IG, MG  
GET       :      :      

<u>OG</u>		<u>IG</u>		<u>MG</u>	
.      CM		.      CM		.      CM	
(240.0)		(270.0)		(00.0)	
.      LM		.      LM		.      LM	
(060.0)		(090.0)		(00.0)	

8 Voice Gimbal Angles And Time To MSFN



104:57

- 1 Match Indicated Angles  
SLEW,  
Set P \_\_\_\_\_ (+68)  
Y \_\_\_\_\_ (+19)  
ANT - FWD  
TLM - OFF/LO

- 2 VHF B XMTR - DATA

\*\*\*\*\* LOS 104:59 \*\*\*\*\*

105:10

LMP IVT TO LM

- 1 CB(16) SE AUDIO - Open  
CB(16) LCG PUMP - Open  
Connect To LMP Hoses  
SUIT ISOL - SUIT FLOW  
Connect To LM Comm Umbilical
- 2 CB(16) SE AUDIO - Close  
LCG PUMP - Close

6

Basic Date \_\_\_\_\_ October 7, 1969  
 Changed \_\_\_\_\_ October 22, 1969

105:20

105:20

DROGUE AND PROBE INSTALLATION

ASCENT BATTERY ACTIVATION & CHECKOUT

- 1 Verify:
  - Both Electrical Umbilicals Removed
  - Drogue Lock Lever Engaged & Flush
  - Three Capture Latches Engaged & Locked
  - LM Hatch Exterior Insulation O.K.
  - Flaps Secured Around Handles
  
- 2 Close & Secure Hatch
  - CABIN DUMP (OVHD) - AUTO
  - PRESS REG A&B - CABIN
  - SUIT GAS 'VERTER - PUSH/CABIN

- 1 CB(16) EPS: ASC ECA CONT - Close
  
- 2 POWER/TEMP MON SEL - BAT 5  
BAT 5 NORMAL FEED-ON (Verify BAT Current)
  
- 3 POWER/TEMP MON SEL - SE BUS Then BAT 6  
BAT 6 NORMAL FEED-ON (Verify BAT Current)
  
- 4 BAT 1,2 HI-VOLT-OFF/RESET  
BAT 3,4 HI-VOLT-OFF/RESET  
Verify BAT Current = 0  
POWER/TEMP MON SEL-CDR BUS Then SE BUS
  
- 5 BAT 5 BACKUP FEED-ON  
BAT 6 BACKUP FEED-ON  
BAT 5 NORMAL FEED-OFF/RESET  
BAT 6 NORMAL FEED-OFF/RESET  
POWER/TEMP MON SEL-CDR BUS, SE BUS,  
Then BAT Current

\*\*\*\*\*UD - 2:30 (105:24)\*\*\*\*\*

DROGUES & PROBE  
ASC BAT CK

ACT-34

\*\*\*\*\*  
\*\*\*\*\* SR 105:26 \*\*\*\*\*

6 BAT 1&2 HI VOLT-ON  
BAT 3&4 HI VOLT-ON  
Verify BAT Current

7 BAT 5 BACKUP FEED-OFF/RESET  
BAT 6 BACKUP FEED-OFF/RESET  
Verify BAT Current = 0

8 CB(16) EPS: ASC ECA CONT - Open

9 Record ED BAT Voltage For MSFN  
BAT A \_\_\_\_\_  
BAT B \_\_\_\_\_

L 105:30  
O  
I AGS ACTIVATION & SELF TEST

1 AGS STATUS - STBY (Master Alarm,  
AGS Warning Lt-On)  
CB(16) STAB/CONT: AEA-Close  
(AGS Warning Lt-Off)  
CB(11) AC BUS B: AGS - Close  
AGS STATUS - OPERATE  
(Master Alarm & AGS Warning Lt-On)  
02/H2O QTY MON - C/W RESET

Basic Date October 7, 1967  
Changed November 3, 1967

Lf

LM-6

Basic Date            October 7, 1969

Changed            October 22, 1969

ACT-35

- 2 000+888888 (OPR ERR Lt-On)
- 3 123-45679
- 4 412+0 REINITIATE TEST  
412R +1 SELF TEST SATISFACTORY  
+3 LOGIC TEST FAILURE  
+4 MEMORY TEST FAILURE  
+7 LOGIC AND MEMORY TEST FAILURE
- 5 574R DESCENT STAGE FLAG (+ Not Staged)
- 6 604 LUNAR SURFACE FLAG (+ Not On  
Lunar Surface)
- 7 612R STAGING SEQ COUNTER (+0 Nom)

\*\*\*\*\* AOS 105:45 \*\*\*\*\*

L 105:46

O  
I LANDING GEAR DEPLOY

1 CB(11) ED: LDG GEAR FLAG-Close  
          : LOGIC POWER A-Open  
MASTER ARM-ON  
LDG GEAR DEPLOY-FIRE, tb-gray

LDG GEAR DEPLOY  
AGS T/O

105:45

ANT-FWD, Verify Comm  
SLEW (>3.0), AUTO (>3.8)  
TLM-HI, BIOMED - LEFT

LDG GEAR DEPLOY  
AGS T/O

ACT-36

CB(11) ED: LOGIC POWER A-Close  
LDG GEAR DEPLOY-FIRE  
MASTER ARM-OFF  
CB(11) ED: LDG GEAR FLAG-Open

L 105:50  
O  
I \*MSFN - UPDATE

1 UPDATA LINK - DATA  
MSFN P-27 Updates REFSMMAT/  
STATE VECTOR  
UPDATE LINK - OFF

\*\*\*\*\*UD - 2:00 (105:54)\*\*\*\*\*

L 105:55  
O  
I \*IMU FINE ALIGN

Copy DAP Data \_\_\_\_\_ Code  
LM Wt  
CSM Wt

Copy Ground Calculated Gyro  
Torquing Angles

X \_\_\_\_\_, Y \_\_\_\_\_, Z \_\_\_\_\_

LV -

Basic Date October 7, 1969  
Changed \_\_\_\_\_

LM-6

Basic Date            October 7, 1969  
Changed                       October 20, 1969

ACT-37

2 V42E Fine Align IMU  
F 21 93 Load Gyro Torquing  
Angles X,Y,Z (.001°)

3 V16 N93E Monitor Torquing  
(All Zero)

4 V06 N20 On CSM Mark-ENTR  
OG \_\_\_\_\_  
IG \_\_\_\_\_  
MG \_\_\_\_\_  
GET \_\_\_\_\_:\_\_\_\_\_:\_\_\_\_\_

L             
O             
I             
           105:57  
           AGS INITIALIZATION

- 1 V16 N65E  
Set AGS Time (377) 100 hr Bias
- 2 V47E, 414+1
- 3 400+3 AGS/PGNS Align
- 4 V83E, 317R, 440R

ACT-38

L  
O  
I

106:00

106:00

1 \* DAP SET, GIMBAL/THROTTLE TEST

1 CB(11) STAB/CONT: DECA PWR-Close  
 MODE CONT: PGNS - AUTO  
 Verify GUID CONT - PGNS  
 THR CONT - MAN  
 MAN THROT - CDR  
 TTCA (Both) - THROTTLE (MIN) Set Friction

2 Verify MSFN Contact  
 V48E  
 R1 32022  
 PRO

3 F 06 47 LM,CSM Wt. (lbs)  
 R1 \_\_\_\_\_ (+33926)  
 R2 \_\_\_\_\_ (+37208)  
 PRO

4 F 06 48 GMBL TRIM,PITCH,ROLL (.01°)  
 R1 \_\_\_\_\_ (+00501)  
 R2 \_\_\_\_\_ (+00566)

1 Copy & Load AGS Pad

224 \_\_\_\_\_ (+60326)

225 \_\_\_\_\_ (+58158)

226 \_\_\_\_\_ (+70312)

227 \_\_\_\_\_ (-50181)

UNDOCKING Time \_\_\_\_\_:\_\_\_\_\_:\_\_\_\_\_

SEP Time \_\_\_\_\_:\_\_\_\_\_:\_\_\_\_\_

2 232 00600

233 00250

464 00500

465 00195

616 +0

LM 6

Basic Date October 7, 1969  
 Changed November 3, 1969

LM-6

Basic Date            October 7, 1969  
Changed            November 3, 1969

ACT-39

ENG STOP - PUSH

ENG ARM - DES (DES REG Warn Lt-On)

623 +0

MSFN Verify GDA Position

514 R            (-65034)

(TERM) V34E

515 R            (-41734)

516 R            (+00000)

5 TTCA (Both)-Min,Then Soft Stop (50%)

Then Max (98%), Then Min

Adjust Friction

MAN THROT - SE

Repeat Test For LMP TTCA

6 ENG ARM - OFF

Cycle CWEA (DES REG Lt - off)

ENG STOP - RESET

MAN THROT - CDR

TTCA(CDR)-JETS

7 Give CSM Go For MVR To

Landmark Track Attitude

\*\*\*\*\* UD - 1:45 (106:09) \*\*\*\*\*

106:15

RATE GYRO CHECK

1 Verify CSM Holding Attitude

GYRO TEST - POS RT (RPY RATE +5°/sec)

GYRO TEST - NEG RT (YPR RATE -5°/sec)

RATE GYRO CK  
RCS PRESS



RATE GYRO CK  
RCS PRESS

ACT-40

2 RATE SCALE -5° SEC  
Repeat Tests

106:20

1 After CSM Mnv'r To  
Landmark Track Attitude  
V06N20 On CSM Mark-ENTR  
OG \_\_\_\_\_  
IG \_\_\_\_\_  
MG \_\_\_\_\_  
GET \_\_\_\_:\_\_\_\_:\_\_\_\_

1 Match Indicated Angles  
SLEW  
Set P \_\_\_\_\_ (+104)  
Y \_\_\_\_\_ (+01)  
ANT - FWD  
TLM - OFF/LO

\*\*\*\*\* UD - 1:30 (106:24) \*\*\*\*\*

L 106:25  
O  
I RCS PRESSURIZATION

- 1 RECYCLE: SYS A&B ASC FEED 2(2) - CLOSE  
SYS A&B ASC FEED 1(2) - OPEN
- 2 RCS QUANTITY A&B - 100%  
SYS A&B ASC FUEL & ASC OXID - tb(4) Remain-bp  
SYS A&B THRUSTER PAIR QUADS - tb(8) gray  
(Possible tb-Red, Cycle CWEA If Necessary)  
RECYCLE: CRSFD-CLOSE  
: MAIN SOV SYS A&B - OPEN  
HTR CONT TEMP MON - Check RCS QUADS (>119°)

LM

Basic Date \_\_\_\_ October 7, 1969  
Changed \_\_\_\_ November 3, 1969

Basic Date            October 7, 1969  
 Changed                       October 22, 1969

## ACT-41

- 3 TEMP/PRESS MON - He 2820-3280 psia  
 PRPLNT (40°-100°/10-50 psi)  
 FUEL MANF (25-90 psi)  
 OXID MANF (25-90 psi)
- 4 CB(16) LOGIC PWR B-Open  
 MASTER ARM - ON  
 HE PRESS RCS - FIRE  
 (RCS A&B REG Warning Lts-Off)  
 RECYCLE: SYS A&B ASC FEED 2(2) - CLOSE  
 CB(16) LOGIC PWR B-Close  
 MASTER ARM-OFF
- 5 RECYCLE: SYS A&B ASC FEED 1(2) - OPEN  
 : SYS A&B THR PAIR QUADS(8)-OPEN  
 : CRSFD - CLOSE  
 : SYS A&B MAIN SOV-OPEN
- 6 TEMP/PRESS MON - OXID MANF (175-188 psi)  
 - FUEL MANF (175-188 psi)  
 - PRPLNT (40°-100°/178-188 psi)  
 - He (2750-3200 psi)  
 Read He Pressure To MSFN

106:40106:40

1 After CSM Completes Tracking  
 On CSM MARK - ENTR  
 OG \_\_\_\_\_  
 IG \_\_\_\_\_  
 MG \_\_\_\_\_  
 GET \_\_\_\_:\_\_\_\_:\_\_\_\_

ANT - FWD, Verify Comm  
 SLEW (>3.0), AUTO (>3.8)  
 TLM - HI, BIOMED - LEFT

2 Monitor FDAI For Gimbal Lock Avoidance

106:45

2 After CSM Mvnr To AGS Calib Att  
 On CSM MARK - ENTR  
 OG \_\_\_\_\_  
 IG \_\_\_\_\_  
 MG \_\_\_\_\_  
 GET \_\_\_\_:\_\_\_\_:\_\_\_\_

106:46\* RCS CHECKOUT

1 GUID CONT - PGNS  
 ATT TRANSL - 4 JET  
 ATT CONT (3) - PULSE  
 MODE CONT (Both) - ATT HOLD

L1

Basic Date    October 7, 1969  
 Changed            November 3, 1969

Basic Date            October 7, 1969Changed           

## ACT-43

ACA/4 JET (CDR) - DISABLE

TTCA (CDR) - JETS

Verify HBR With MSFN & CSM In  
Wide Deadband & Attitude Hold2 TTCA (Cold Fire) Check

V76E

V11N10E, 5E

CDR TTCA

UP	(+X) - R1	00252	(QUAD Flags & RCS TCA
DN	(-X) -	00125	Warn Lts - On)

E, 6E

RIGHT	(+Y) - R1	00220
-------	-----------	-------

LEFT	(-Y) -	00140
------	--------	-------

FWD	(+Z) -	00011
-----	--------	-------

AFT	(-Z) -	00006
-----	--------	-------

3 PGNS RATE CMD (Cold Fire), AGS PULSE (Cold Fire) Check

CB(11) ATT DIR CONT - CLOSE

V77E

V15 N01E, 42E

CDR ACA (To Soft Stop, Pause 2 sec At Null)

ROLL RIGHT	R3	00051
------------	----	-------

ROLL LEFT		77726
-----------	--	-------

PITCH UP	R1	00051	(QUAD Flags & RCS TCA Warn Lts-On)
----------	----	-------	------------------------------------

PITCH DN		77726
----------	--	-------

YAW RIGHT	R2	77726
-----------	----	-------

YAW LEFT		00051
----------	--	-------

RCS C/O

ACT-44

- 4 AGS RATE CMD (Cold Fire), 4 JET SEC  
COIL (Hot Fire) Check  
CSM WIDE DEADBAND, ATT HOLD  
Verify CMC MODE - FREE And Tunnel Vented To Zero  
GUID CONT - AGS  
ATT CONT (3) - MODE CONT  
ACA/4 JET (CDR) - ENABLE  
CDR ACA (Deflect Slowly To Hardover, Pause 2 sec At Null)  
ROLL - RIGHT  
ROLL - LEFT  
PITCH - UP (QUAD Flags & RCS TCA Warn Lts-On)  
PITCH - DN  
YAW - RIGHT  
YAW - LEFT
- 5 PGNS MIN IMP (Hot Fire) Check  
GUID CONT - PGNS  
V76E  
CB(11) RCS SYS A: QUAD TCA (4) - Close  
CB(16) RCS SYS B: QUAD TCA (4) - Close  
CB(16) INST: CWEA - Open Then Close  
CYCLE TEMP MON  
V11N10E, 31E R1 67777  
CDR ACA (Out Of Detent (2 1/2°), Pause 2 sec At Null)  
ROLL RIGHT - R1 27757  
ROLL LEFT - R1 27737  
YAW RIGHT (Twice) - R1 27767  
YAW LEFT (Twice) - R1 27773

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

L:

LM-6

Basic Date \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_ October 22, 1969

ACT-45

V48E, V21E, 31022E, PRO, V34E  
V11N10E, 31E

CDR ACA(Out of Detent (2 1/2°), Pause 2 sec At Null)

PITCH UP - R1 27776

PITCH DN - R1 27775

- 6 ATT CONT (3) - PULSE
- GUID CONT - AGS
- ATT TRANSL - 2 JET

106:53

- 1 Match Indicated Angles  
SLEW  
Set P \_\_\_\_\_ (+131)  
Y \_\_\_\_\_ (+24)  
ANT - AFT  
TLM-OFF/LO
- 2 VHF B XMTR - DATA

\*\*\*\*\* UD - 1:00 (106:54) \*\*\*\*\*

\*\*\*\*\* LOS (106:57) \*\*\*\*\*

RR SELF TEST

AGS CALIB

RR SELF TEST  
AGS CALIB

ACT-46

107:00

RNDZ RDR SELF TEST

- 1 CB(11) RR(2) - Close (NO TRACK Lt-On)  
Verify: CSM RCS Thruster B3 - OFF  
      : Radar Xponder - Off  
RNDZ RDR ANT - Released  
X-POINTERS (Both)-HI MULT  
RATE/ERR MON (Both) - RNDZ RADAR  
ATTITUDE MON (Both) - PGNS  
MODE SEL - LDG RDR

- 2 RNG/ALT MON - RNG/RNG RATE  
SHFT/TRUN - +50°  
RR MODE - SLEW  
TEMP MONITOR - RNDZ (+10° To +50°)

CB(11) AC BUS A: RNG/RNG RT/ALT/ALT  
                  RT - Close  
RR GYRO SEL - SEC  
FLIGHT DISPLAYS: RNG/RNG RT/ALT/ALT  
                  RT-Close

- 3 SLEW RATE-HI  
Slew Left To Mode I Region (18 sec)  
Slew Right, Down, Left, Up  
  (FDAI Needles Right, Down, Left, Up)

107:01

AGS CALIBRATION

- 1 V16 N20E  
16 20 ICPU Angles, 0, I, M  
CSM Mnvr Until LM ICPU'S:  
   292.5° (OG)  
   338.0°  
   337.0°  
RATES <.075/sec
- 2 V40 N20E ICPU ZERO

L:

Basic Date            October 7, 1969  
Changed                            NOVEMBER 5, 1969

LM-6

Basic Date            October 7, 1969  
Changed                       October 31, 1969

ACT-47

3

Read and record: ACCEL BIAS COEFF

SLEW RATE - LO  
SHFT/TRUN - + 5°  
Slew Right, Down, Left, Up  
(FDAI Needles Right, Down, Left, Up,  
1°/sec; X-Pointer-3 mr/sec)

540 X  $\frac{\quad}{(-00014)}$  (.001 ft/sec 2)

541 Y  $\frac{\quad}{(-00004)}$  (.001 ft/sec 2)

542 Z  $\frac{\quad}{(+00002)}$  (.001 ft/sec 2)

4 RR MODE - AUTO TRACK  
RADAR TEST - RNDZ RDR (Rng Rt Tape  
Drives To -500fps, X-Pointers and FDAI  
Needles Vary Between +5°. After 12 sec  
Rng Tape Drives to 194, NO TRACK Lt-Off)

GYRO DRIFT COEFF

544R X  $\frac{\quad}{(-00006)}$  (.01/hr)

545R Y  $\frac{\quad}{(+00016)}$  (.01°/hr)

546R Z  $\frac{\quad}{(+00007)}$  (.01°/hr)

5 TEST MONITOR - AGC (1.5)  
- XMTR (3.7)  
- SHAFT ERR(2.2 To 2.6  
@1/ cps)  
- TRUN ERR (2.2 To 2.5  
@1/2 cps)  
- AGC

4 Verify CSM Thrusters Disabled  
and LM in AGS PULSE MODE

6 Set NORRMON Flag  
V25 N07E  
101E, 10E, 1E  
RR MODE - LGC (NO TRACK Lt - On)  
(Wait 10 sec)



ACT-48

- |  |          |   |
|--|----------|---|
| <p>7 V63E Start RR Self Test<br/>         F 04 12<br/>         R1 00004 Specify Radar<br/>         R2 00001 Rndz Radar<br/>         PRO<br/>         NO TRACK Lt-On(Off After 12 sec)</p>              | <p>5</p> | <p>400 + 6 CALIBRATE GYRO &amp; ACCEL<br/>         After 32 sec:<br/>         Read and Record</p> <p>540R _____ (.001 ft/sec<sup>2</sup>)<br/>         541R _____ (.001 ft/sec<sup>2</sup>)<br/>         542R _____ (.001 ft/sec<sup>2</sup>)</p> <p>Values Should Not Change From Step 3<br/>         By More Than .039 ft/sec<sup>2</sup> (.008nom)</p> |
| <p>8 F 16 72 TRUN, SHAFT (.01°)<br/>         R1 Varying At 1/2 cps<br/>         R2 Varying At 1/2 cps<br/>         PRO</p>   | <p>6</p> | <p>400R(+0 After 302 sec)<br/>         Notify CSM To Enable Thrusters<br/>         Read and Record</p> <p>544R _____ (.01°/hr)<br/>         545R _____ (.01/hr)<br/>         546R _____ (.01/hr)</p> <p>Values Should Not Change From<br/>         Step 3 By More Than 2.0°/hr<br/>         (.9 Nominal)</p>  |
| <p>9 F 16 78 RANGE, RANGE RATE, TFI (.01mm,<br/>         fps min-sec)<br/>         R1 +195.30 To +195.70 (TM Within <u>+1.2</u> of<br/>         R1)<br/>         R2 -00480 To -00520 (TM-R2 &lt;2)</p> |          |   |
| <p>10 V34E</p>   |          |   |
| <p>11 RADAR TEST -OFF(NO TRACK Lt-On,<br/>         X-Pntr-Center)</p>  |          |   |
| <p>12 V40 N72E RR CDU ZERO (10 sec)<br/>         SHFT/TRUN - <u>+50°</u></p>   |          |   |

Li

Basic Date — October 7, 1969  
 Changed October 31, 1969

LM-6

Basic Date            October 7, 1969  
Changed            NOVEMBER 5, 1969

ACT-49

13 V41 N72 (+04000, +04000)  
PRO  
V44E

14 SHFT/TRUN  $\pm 5^\circ$   
RR GYRO SEL - PRIM  
V41 N72 (-00400, -00400)  
PRO  
V44E

15 V41 N72 (+00000, +28300)  
PRO  
CB(11) RR(2) - Open  
(NO TRACK Lt-Off)  
V44E

Notify CSM To Enable Thruster B3  
16 RATE/ERR MON (LMP)-LDG RDR/CMPTR  
ATT MON (LMP) - AGS

\*\*\*\*\* UD - :45 (107:09) \*\*\*\*\*

107:12

107:12

Don Helmet & Gloves

Don Helmet & Gloves

ARS/PGA CK

ACT-50

T07:17ARS/PGA PRESSURE INTEGRITY CHECK

- 1 SUIT GAS DIVERTER - PULL/EGRESS  
CABIN GAS RETURN - EGRESS  
SUIT CIRCUIT RELIEF - CLOSE  
PRESS REG A - CLOSE  
PRESS REG B - DIRECT O2 (Suit Press to  
8.85 psia)  
PRESS REG B - CLOSE (Monitor Cuff Gage  
Decay <.3 Psi in 1 min)
- 2 CO2 CANISTER SEL - SECONDARY (CO2 Comp  
Lt-On, Monitor Cuff Gage, <.3 psi In  
1 min)  
CO2 CANISTER SEL - PRIMARY (CO2 Comp  
Lt-Off)
- 3 SUIT CIRCUIT RELIEF - AUTO  
PRESS REG A&B - CABIN  
CABIN GAS RETURN - AUTO  
SUIT GAS DIVERTER - PUSH/CABIN

LM

Basic Date            October 7, 1969  
Changed            November 3, 1969

Basic Date \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_ October 20, 1969

ACT-51

107:22

REGULATOR CHECK

- 1 Verify CSM Tunnel Hatch, Press Equalization,  
And Tunnel Vent v'lvs Closed, And Tunnel Vented
- 2 CABIN GAS RETURN - EGRESS  
Verify: OVHD CABIN DUMP VALVE - AUTO  
: CABIN REPRESS - AUTO  
PRESS REG B - EGRESS  
(SUIT GAS DIVERTER - EGRESS)
- 3 FWD CABIN DUMP VALVE - OPEN Then AUTO At  
Master Alarm, CABIN Warning Lt - On  
Verify AUTO CABIN REPRESS Between 4.45 to 3.7 psi
- 4 As Soon As Possible:  
PRESS REG A - CLOSE  
(CABIN Warning Lt - Off, Cabin  
Repress Stops)  
CABIN REPRESS - CLOSE  
FWD CABIN DUMP VALVE - OPEN Then AUTO  
At 3.5 psi (Verify Suit Press 3.6  
to 4.3 psi)

REG CHECK  
DPS PRESS

REG CHECK  
DPS PRESS

ACT-52

- 5 PRESS REG B - CLOSE (Possible Master Alarm,  
CABIN Warning Lt - On (Momentarily))  
SUIT CIRCUIT RELIEF - OPEN Then  
AUTO At Suit Press of 3.5 psi  
PRESS REG B - EGRESS (Suit Press  
3.6 to 4.0 psi, Possible Master Alarm &  
CABIN Warning Lt - On (Momentarily),  
CABIN REPRESS - AUTO
  
- 6 PRESS REG A&B - CABIN (CABIN Warning Lt-On)  
Cabin Press Rises 4.6 to 5.0 psia  
(CABIN Warning Lt-Off)  
CABIN GAS RETURN - AUTO  
SUIT GAS DIVERTER - PUSH/CABIN

\*\*\*\*\* UD - :30 (107:24) \*\*\*\*\*

\*\*\*\*\* SR 107:24 \*\*\*\*\*

L 107:32  
O  
I DPS PRESSURIZATION AND CHECKOUT

L 107:32  
O  
I AGS UPDATE

1	PRPLNT TEMP/PRESS MON - DES 1&2 (50°-90° FUEL, 50°-90° OXID/ 58-144 psi FUEL, 33-255 psi OXID)	1	V47E, 414+1
		2	400 + 3 AGS/PGNS Align

LI Basic Date October 7, 1969  
 Changed NOVEMBER 5, 1969

LM-6

Basic Date            October 7, 1969  
Changed                       NOVEMBER 5, 1969

ACT-53

- 2 HELIUM MON: AMB PRESS (1490-1780 psi) 3 V83E, 317R, 440R, 277R  
: SUPCRIT PRESS (750-1320 psi) 4 TLM-LO
- 3 DES HE REG 1 tb gray 5 Configure 70mm Camr  
DES HE REG 2 tb-bp (DC/HCEX, f11, focus)
- 4 MASTER ARM - ON  
DES PRPLNT ISOL VLV - FIRE  
HE PRESS/DES START - FIRE  
MASTER ARM-OFF
- 5 PRPLNT TEMP/PRESS MON: DES 2&1  
(50°-90° FUEL, 50°-90° OXID/FUEL 242-253 psi)  
HELIUM MON: AMB PRESS (200-1110 psi)  
: SURCRIT PRESS (750-1320 psi)

\*\*\*\*\* UD - :15 (107:39) \*\*\*\*\*

\*\*\*\*\* AOS 107:43 \*\*\*\*\*

107:43

ANT-AFT, Verify Comm  
SLEW (>3.0), AUTO (>3.8)  
TLM-HI, BIOMED - RIGHT

PREP TO UNDOCK

PREP TO UNDOCK

ACT-54  
GO/NO GO FOR UNDOCKING

T07:45

PREP FOR UNDOCKING

- 1 Verify Undocking Attitude (180,285,300)  
S-BD-PM, PRIM, PRIM, VOICE,  
PCM, RANGE  
VHF-VOICE, ON, OFF, ON, RIGHT, HI  
AUDIO (Both): VHF A - T/R  
VHF B - RCV
  
- 2 MISSION TIMER-SET  
EVENT TIMER-SET, Count Up To 108:24 (Undock  
At ET of 30:00)  
OVHD HATCH-LOCKED  
OVHD CABIN RELIEF & DUMP - AUTO  
PRESS REG A&B - CABIN
  
- 3 GUID CONT - AGS  
MODE SEL - LDG RADAR  
RNG/ALT MON - RNG/RNG RT  
RATE ERR MON (CDR) - RNDZ RDR  
(LMP) - LDG RDR/CMPTR  
ATTITUDE MON (CDR) - PGNS  
(LMP) - AGS  
RATE SCALE - 5°/SEC

LM

Basic Date            October 7, 1969  
Changed            October 22, 1969

Basic Date \_\_\_\_\_ October 7, 1969  
Changed \_\_\_\_\_ ~~October 20, 1969~~  
November 10, 1969

## ACT-55


- 4 ATT/TRANSL - 2 JET  
BAL CPL - ON  
DEADBAND - MAX  
ATTITUDE CONTROL (3)-PULSE  
MODE CONT (Both) - ATT HOLD  
TTCA (Both) - JET  
RR MODE - SLEW  
CB(11) HTRS: AOT - Close  
Mount Camera On Window Bar  
Install COAS
- 5 ~~Notify CSM To Re-Enable B3 & C4 After  
Undocking~~  
Verify CB Status Per UNDOCKING Chart  
Then Go To LM TIMELINE BOOK
- Voice AGS CALIB Data To MSFN



L  
O  
I

# ACT-56

## UNDOCKING

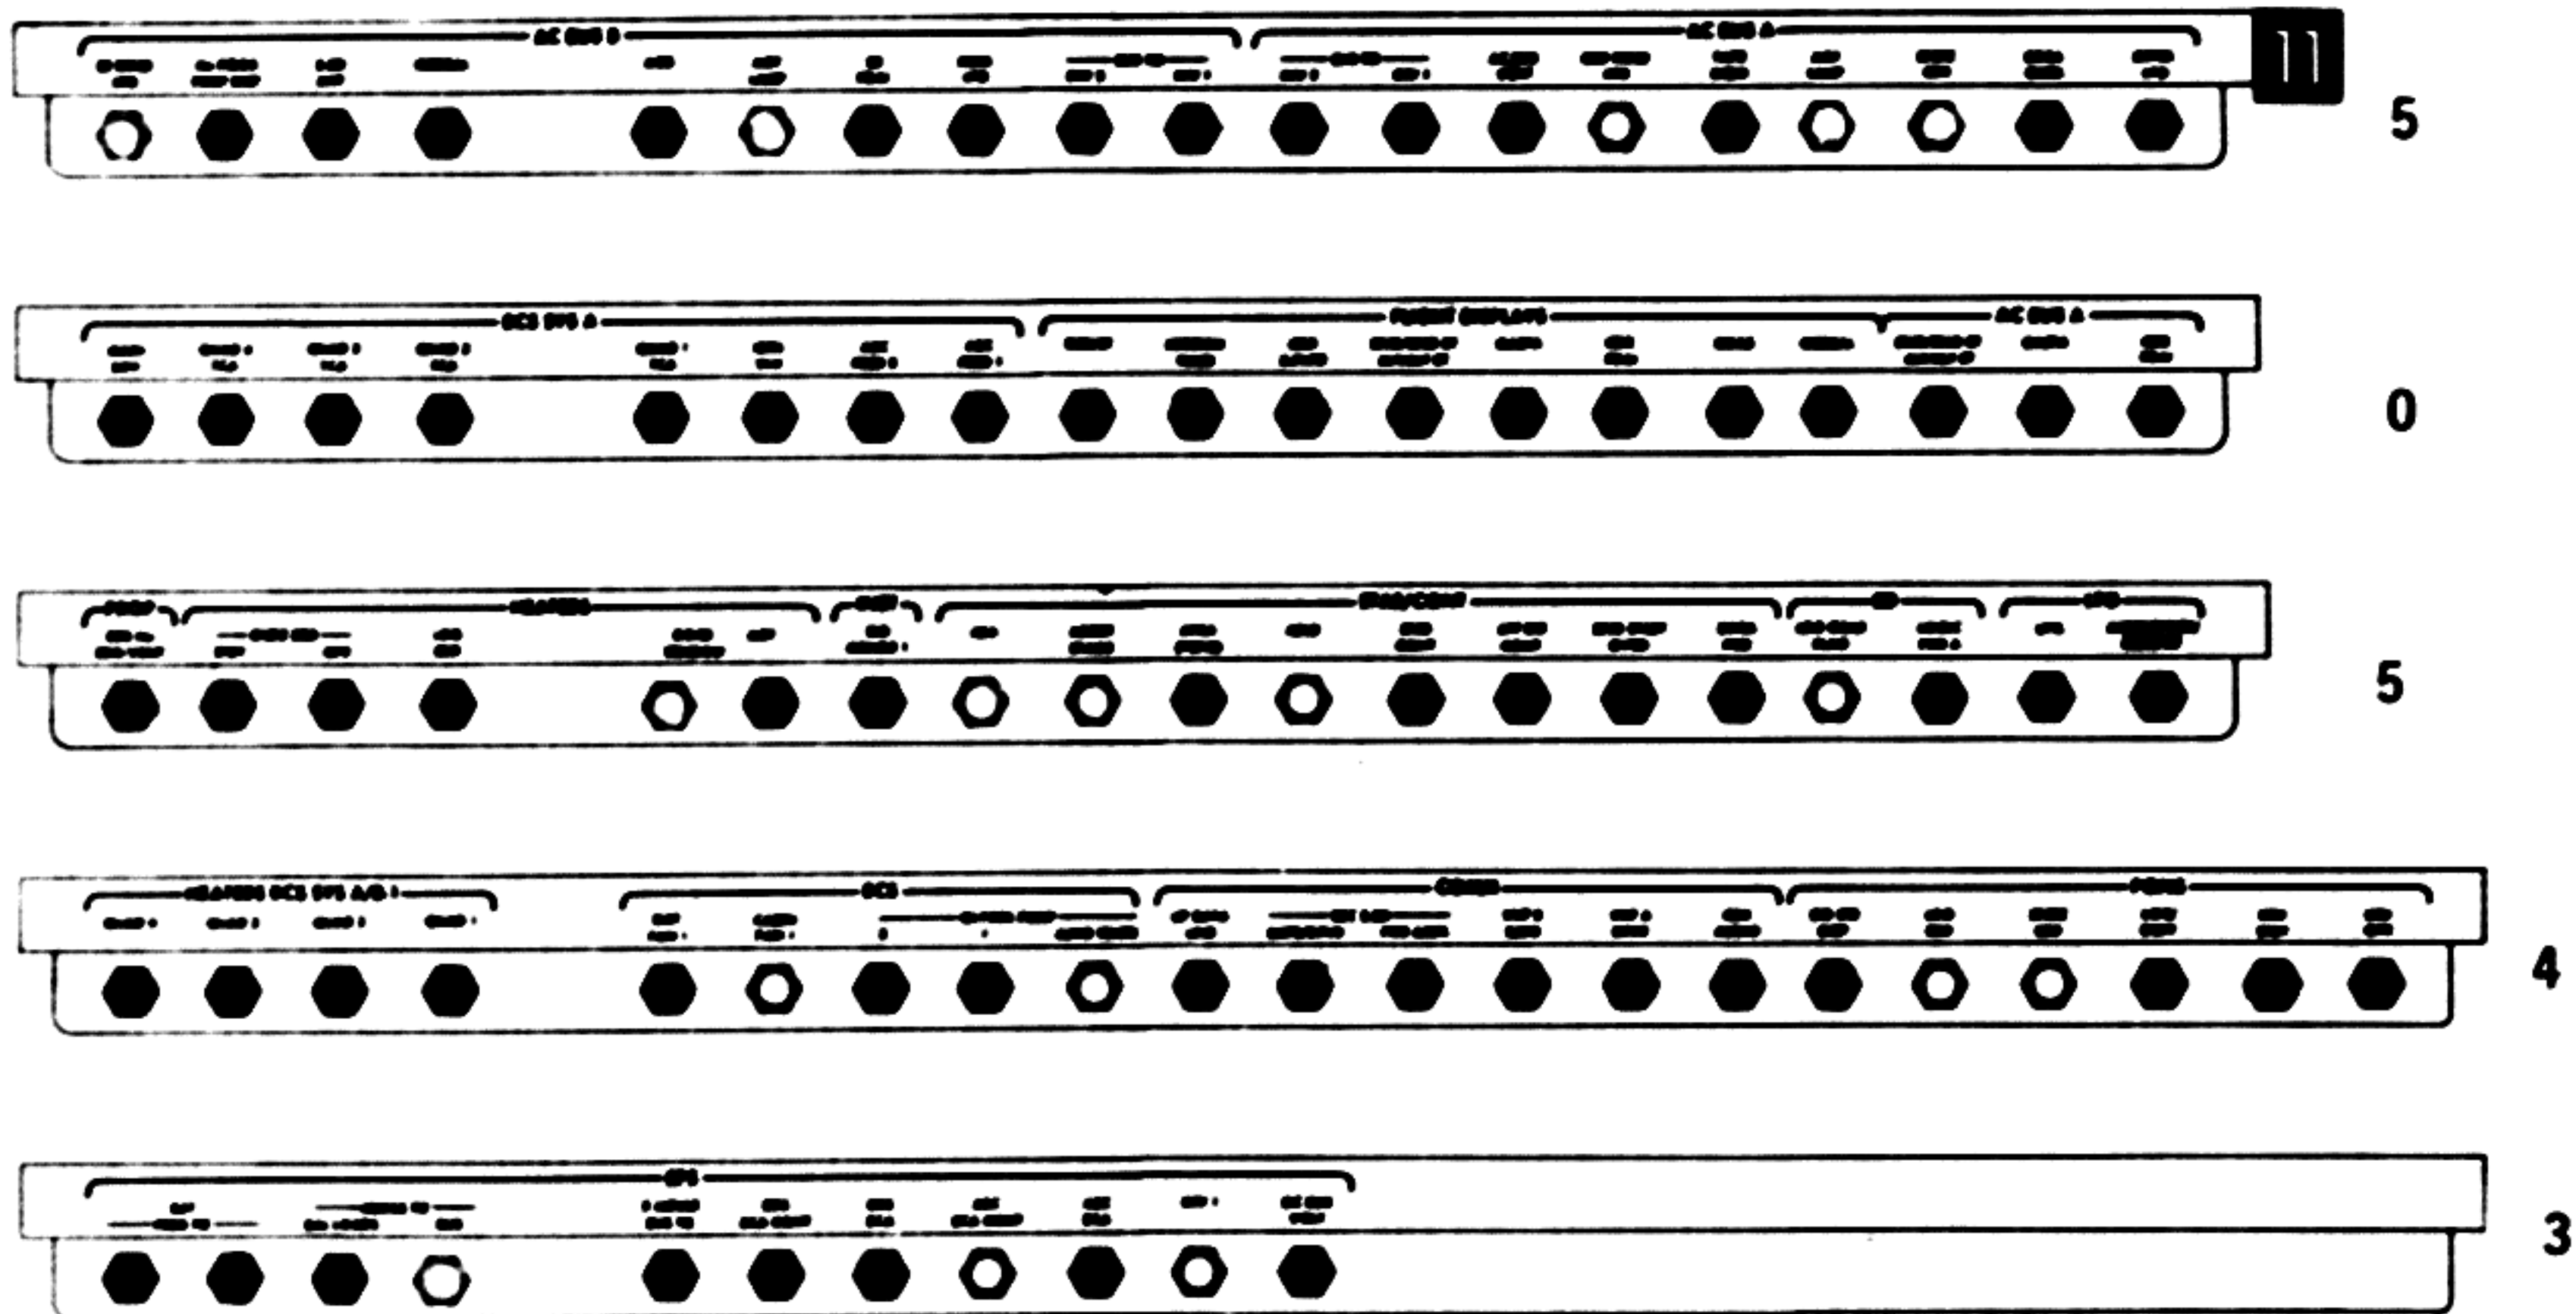

LM-6

Basic Date \_\_\_\_\_ October 7, 1969

Changed \_\_\_\_\_

ACT-57

L  
O  
I

UNDOCKING


16




0



2

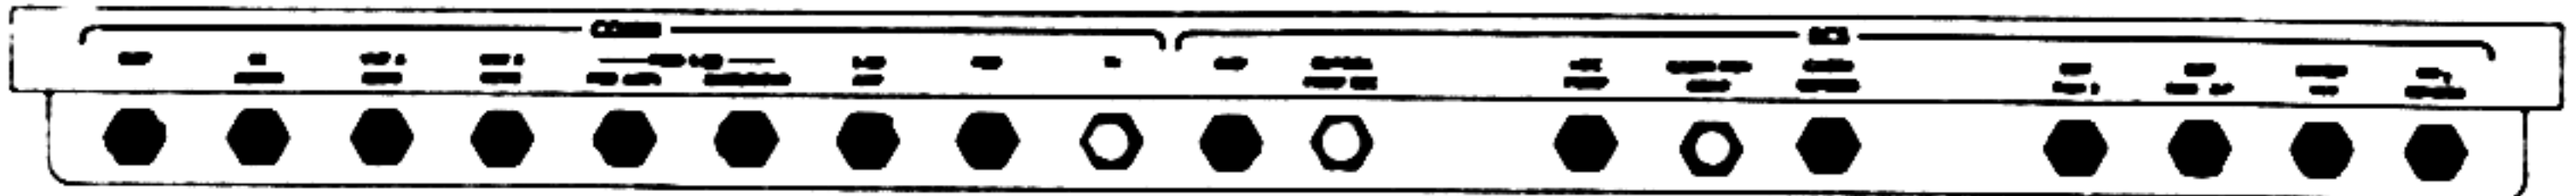

3

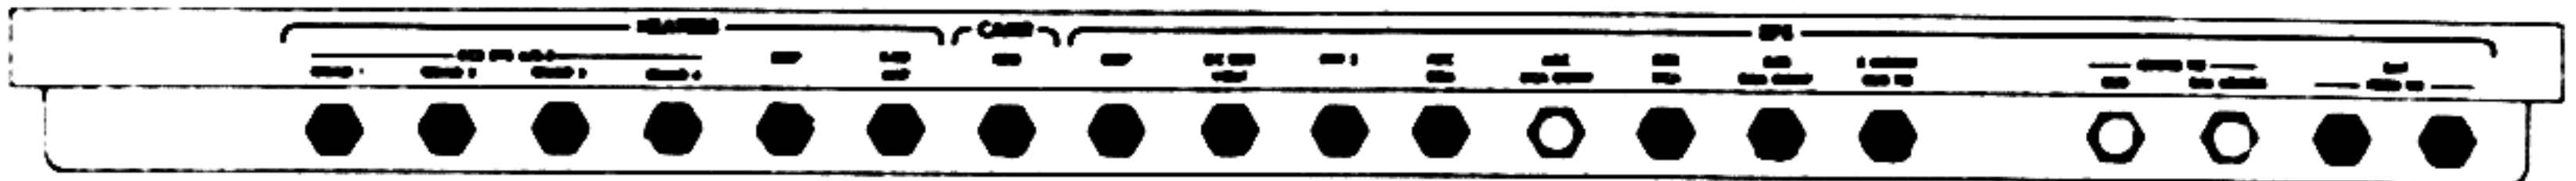

3

ACT/DPS-1

LOI/PGNS/DOCKED DPS

LOI/PGNS/DOCKED  
DPS

1

RCS CHECKOUT

CB (11) ATT DIR CONT - Close  
GUID CONT - PGNS  
ATT CONT (3) - PULSE  
MODE CONTROL (Both) - ATT HOLD  
ATT/TRANSL - 4 JETS  
TTCA (LMP) - JETS

CB (11 & 16) QUAD TCA 1,2,3,4 (8) - Close  
Cycle CWEA  
Cycle TEMP MON

Verify HBR With MSFN  
Verify CSM In Wide Deadband & Attitude Hold

2

TTCA (Hot Fire)

V76E  
V11N10E, 5E  
TTCA (LMP)  
Up (+X) - R1 00252  
Dn (-X) - 00125  
E,6E  
Rt (+Y) 00220  
Lt (-Y) 00140  
Fwd(+Z) 00011  
Aft(-Z) 00006

BURN  
PREP

SUIT GAS DIVERTER - CABIN

**CSM Mnvr To Burn Attitude**

-4:00

CB (11) INV 1 - Close  
MODE CONTROL (PGNS) - AUTO  
ATTITUDE CONT (3) - MODE CONTROL

Basic Date November 5, 1969  
Changed November 6, 1969

LM-6

ACT/DPS-2

CB (16) Cycle CWEA  
Cycle TEMP MON

TTCA (CDR) - THROTTLE (Min)  
TTCA (LMP) - JETS

RATE/ERR MCN (Both) - LDG RDR/CMPTR  
ATTITUDE MON (CDR) - PGNS  
(LMP) - AGS  
RATE SCALE - 5°/SEC

ENG GMBL - ENABLE  
THR CONT - AUTO  
MAN THROT - CDR  
ATT/TRANSL - 4 JETS  
BAL CPL - ON  
DES ENG CMD OVRD - OFF  
ENG STOP (2) - Reset  
ABORT/ABORT STAGE - Reset  
PRPLNT QTY MON - DES 1  
V65E

-1:00 MASTER ARM - ON  
CB (11 & 16) ABORT STAGE (2) - Close

- :30 ENG ARM - DES  
DEADBAND - MAX  
MODE CONT (AGS) - AUTO

- :02 CMC MODE - FREE

LOI/PGNS/DOCKED  
DPS


Basic Date: November 5, 1969  
Changed: November 6, 1969

Basic Date November 5, 1969

Changed

LM-6

LOI/AGS/APS (PGNS TARGETED)

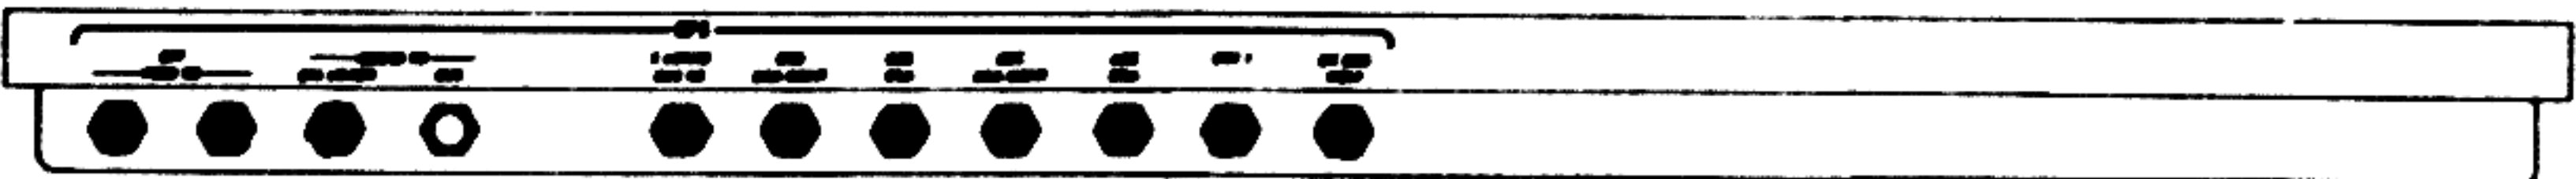


ACT/APS-1

LOI/AGS/DOCKED  
APS

LOI/AGS/DOCKED  
APS

LOI/AGS/APS (PGNS TARGETED)

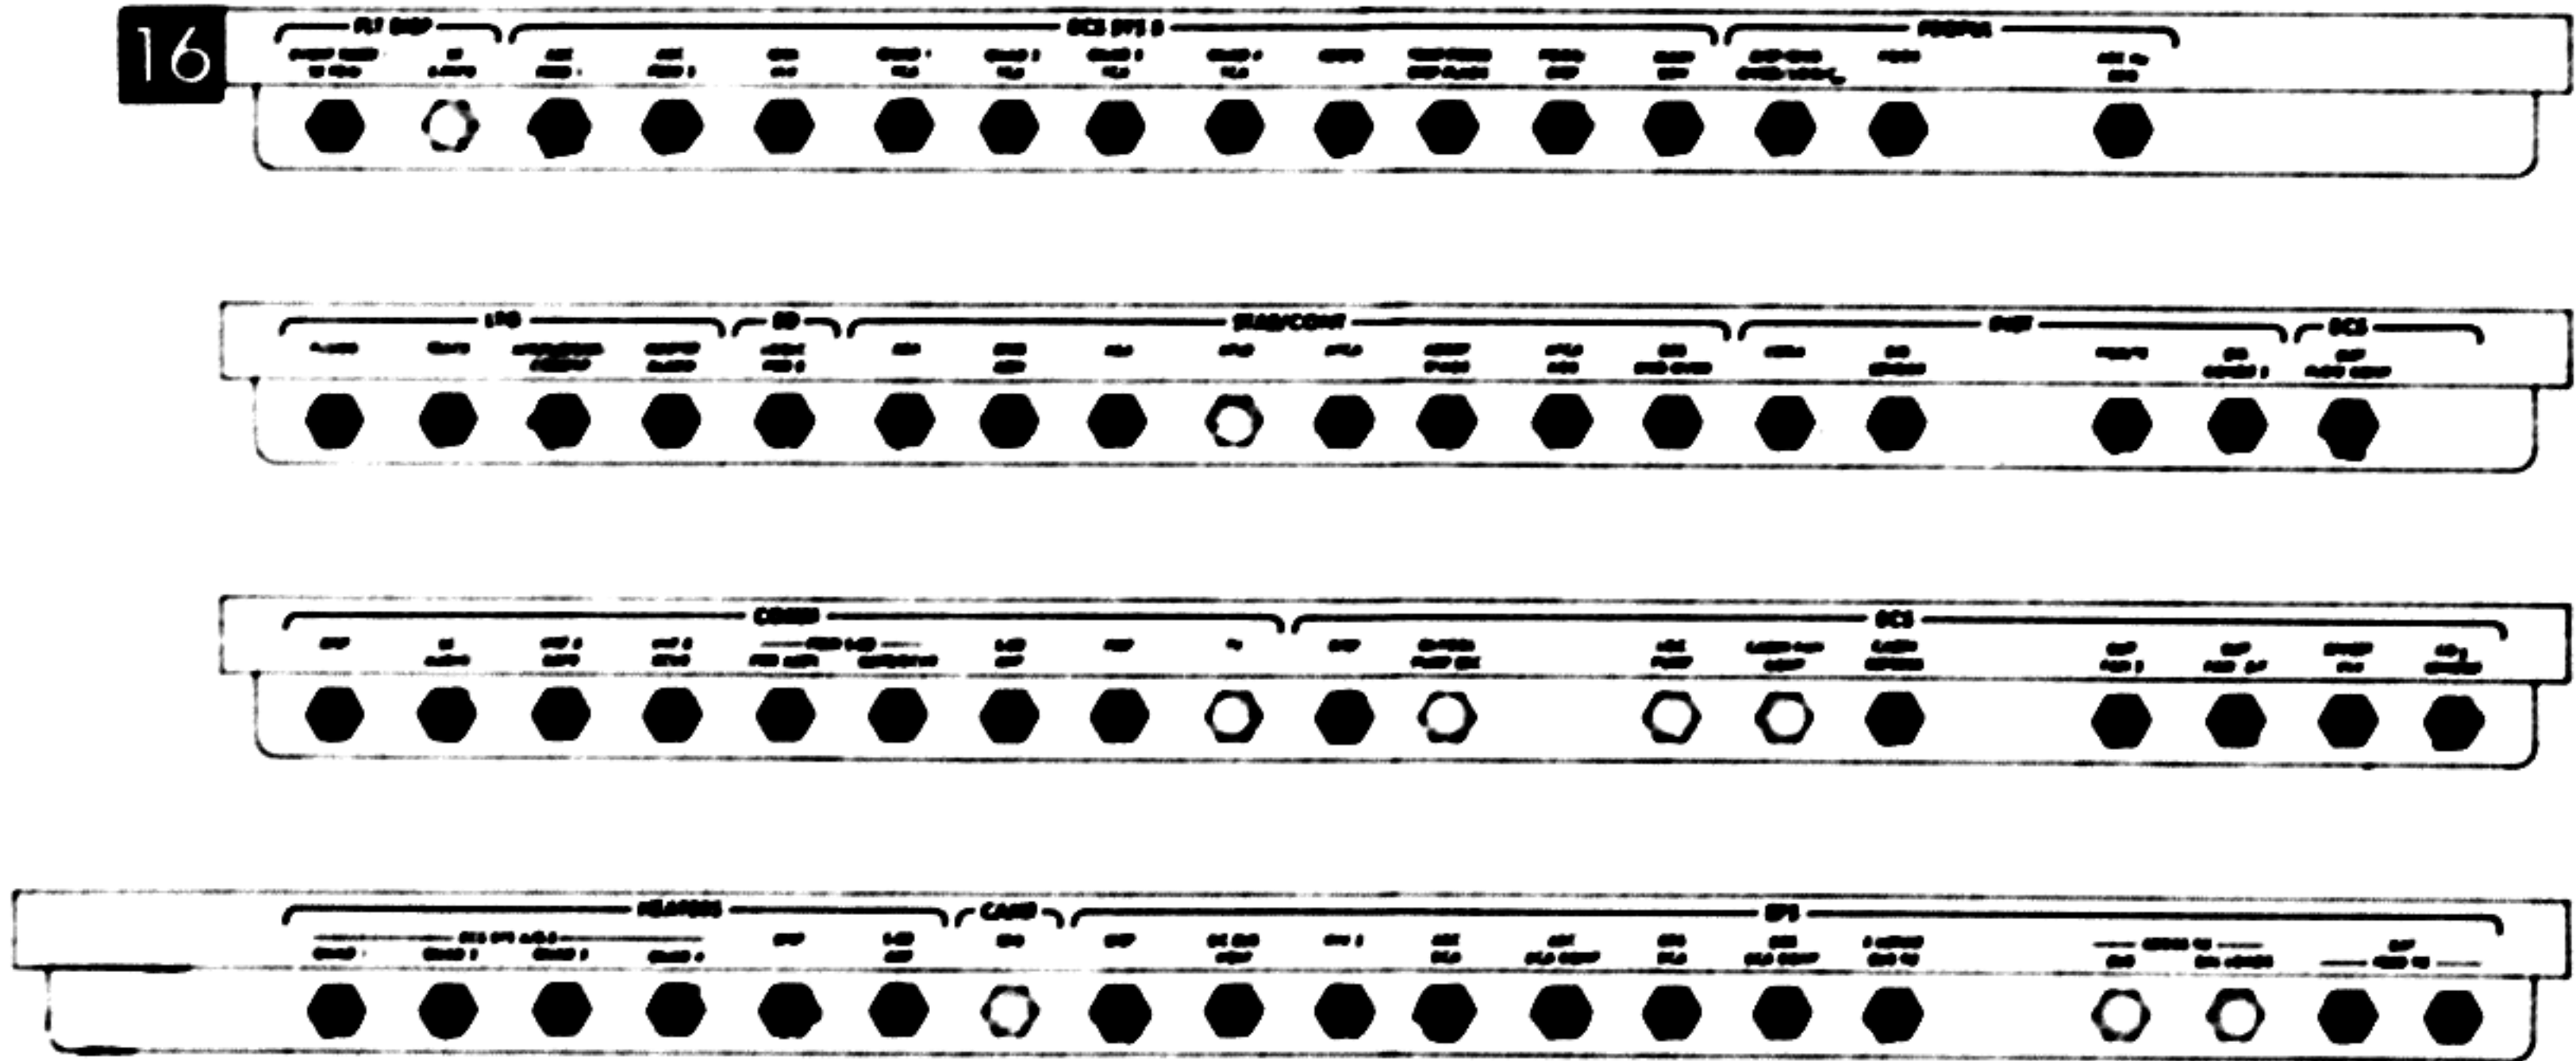

ACT/APS-2

LM-f

Basic Date November 5, 1969  
Changed \_\_\_\_\_

AGS/APS (PGNS TARGETED)APS PREP

- 1 ENG STOP - RESET  
TTCA (CDR) - JETS
- 2 MSFN SUPPLY VGX \_\_\_\_ . \_\_\_\_ fps
- 3 CB (11 & 16 ) AELD (2) - CLOSE

ASC BAT ACT (Must Be Done 20 min Prior To  
BAT 2,4-OFF/RESET)

- 1 BAT 5, 6 - ON, tb - gray  
Verify BAT Current
- 2 BAT 1, 3 - OFF/RESET, tb-bp

APS PRESS

- 1 HELIUM MON - ASC PRESS 1 & 2  
PRPLNT TEMP/PRESS MON - ASC  
ASC He REG 1 & 2, tb (2) - gray  
MASTER ARM - ON  
ASC He SEL - BOTH  
ASC He PRESS - FIRE  
MASTER ARM - OFF

DES/ASC CONSUMABLES

- 1 DES H2O - CLOSE  
WATER TANK SEL - ASC  
ASC H2O - OPEN
- 2 DES O2 - CLOSE  
CABIN REPRESS - CLOSE  
ASC O2 NO. 1 - OPEN

DEACTIVATE DES BATS

- 1 BAT 2, 4 - OFF/RESET, tb-bp  
DES BATS - DEADFACE, tb-bp

Basic Date November 5, 1969

Changed \_\_\_\_\_

LM-6

# ACT/APS-4

## AGS CONFIG


(MSFN Will Uplink State  
Vector & Target Load)

1 V47E, 414+1  
400+3

## DOCKED APS BURN

### APS BURN TECH

- \* If PITCH Error Needle Goes Down, \*
- \* LMP Thrust AFT (Pull Out On TTCA). \*
- \* If ROLL Needle Left, CDR Thrust \*
- \* Right (Push Right ON TTCA). \*
- \* See FDAI Picture Below. \*

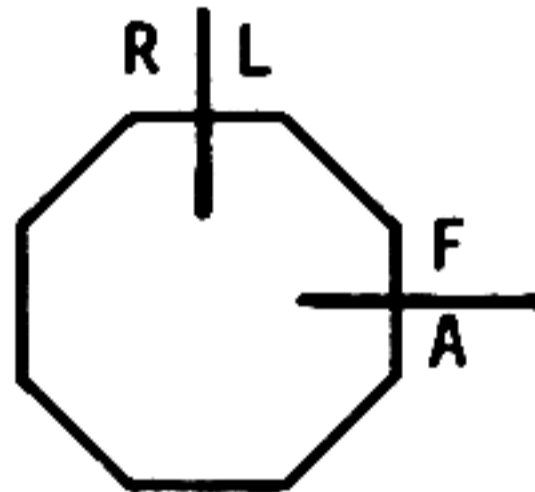

- \* When APS Ignition Occurs, LMP \*
- \* Should Immediately Thrust Aft To \*
- \* Maintain Control. Use Of PITCH \*
- \* ATTITUDE CONTROL Switch To MODE \*
- \* CONT Will Provide An Assist. \*

-6:00

**CSM Mnvr To Burn Attitude**

411+1

Target PGNS (P30/42) & AGS (410+5)

GUID CONT - AGS  
ATTITUDE MON (CDR) - PGNS  
RATE SCALE - 5°/SEC  
ATT/TRANSL - 4 JET  
BAL CPL - ON

ATTITUDE CONT (R,P) - PULSE  
(YAW) - MODE CONT  
MODE CONTROL (Both) - ATT HOLD  
ENG STOP (2) - Reset  
ABORT/ABORT STAGE - Reset

Basic Date November 5, 1969  
Changed November 6, 1969

LM



ACT/APS-5

- 1:00 MASTER ARM - ON
- :30 ENG ARM - ASC
- :10 Manual Ullage
- :07 STAGE - FIRE
- :02 **CMC MODE - FREE**
- :00 ENG START - Push

Basic Date   
Changed 